CTOLIGHTING

MODULO WALL TWIN

FINISH

bronze with smoked kiln cast glass and opal glass shades satin brass with smoked kiln cast glass and opal glass shades

DIMENSIONS (body of fixture)

 $120 \times 80 \times 440 \text{ mm} (w \times d \times h)$

WEIGHT

2kg (4.4lbs)

ILLUMINATION

220-240v - integrated mains LED - 9w - 2700k 110-130v - integrated mains LED - 9w - 2700k

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

WALL ROSE / PLATE


80mm (3.1)

rectangular wall box - $34 \times 232 \times 15 \text{ mm}$ (w x d x h)

CERTIFICATION





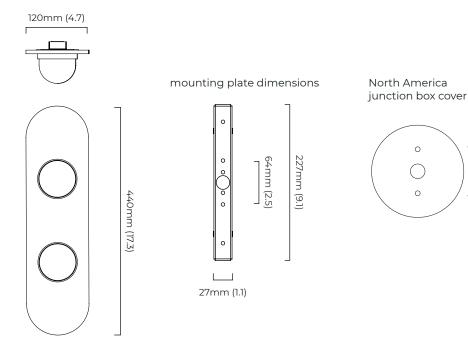

*Diagrams are not to scale.

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
MODWA2BZSKMO-240	bronze with smoked kiln cast glass and opal glass shades	220 - 240V
MODWA2SBSKMO-240	satin brass with smoked kiln cast glass and opal glass shades	220 - 240V
MODWA2BZSKMO-110	bronze with smoked kiln cast glass and opal glass shades	110 - 130V
MODWA2SBSKMO-110	satin brass with smoked kiln cast glass and opal glass shades	110 - 130V



64mm (2.5)

114mm (4.5)

CTOLIGHTING

MODULO WALL TWIN - DALI-A

FINISH

bronze with smoked kiln cast glass and opal glass shades satin brass with smoked kiln cast glass and opal glass shades

DIMENSIONS (body of fixture)

120 x 80 x 440 mm (w x d x h)

WEIGHT

2kg (4.4lbs)

ILLUMINATION

220-240v - integrated mains LED - 9w - 2700k DALI converter to be installed in the wall cavity

DIMMING

DALI compatible


WALL ROSE / PLATE

rectangular wall box - $34 \times 232 \times 15$ mm (w x d x h)


CERTIFICATION








120mm (4.7)





DALI converter dimensions



*Diagrams are not to scale.

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
MODWA2BZSKMO-DALIA-240	bronze with smoked kiln cast glass and opal glass shades	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
MODWA2SBSKMO-DALIA-240	satin brass with smoked kiln cast glass and opal glass shades	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V