CTQLIGHTING

GAIA WALL - WALL PLATE

FINISH

bronze with matt opal glass bronze with shiny opal glass bronze with smoked glass bronze with smoked hand formed glass satin brass with matt opal glass satin brass with shiny opal glass satin brass with smoked glass shade satin brass with smoked hand formed glass

DIMENSIONS (body of fixture)

150 x 190 x 183 mm (w x d x h)

WEIGHT

1.5kg (3.3lbs)

ILLUMINATION

220-240v - 1 x E14 - 25w max (or 4.5w 2700k LED) 110-130v - 1 x E12 - 25w max (or 4.5w 2700k LED)

DIMMING


dimmable bulb required trailing edge dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

WALL ROSE / PLATE


round wall plate - ø 114 x 5 mm (dia x d)

CERTIFICATION






190mm (7.5)



150mm (5.9)



150mm (5.9)

1

64mm (2.5) ° () °

cover plate dimensions

*Diagrams are not to scale.

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
GAIWAOBZMO-PL-240	bronze with matt opal	220 - 240V
GAIWAOBZOG-PL-240	bronze with shiny opal	220 - 240V
GAIWAOBZSG-PL-240	bronze with smoked	220 - 240V
GAIWAOBZHF-PL-240	bronze with smoked hand formed glass	220 - 240V
GAIWAOSBMO-PL-240	satin brass with matt opal	220 - 240V
GAIWAOSBOG-PL-240	satin brass with shiny opal	220 - 240V
GAIWAOSBSG-PL-240	satin brass with smoked	220 - 240V
GAIWAOSBHF-PL-240	satin brass with smoked hand formed glass	220 - 240V
GAIWAOBZMO-PL-110	bronze with matt opal	110 - 130V
GAIWAOBZOG-PL-110	bronze with shiny opal	110 - 130V
GAIWAOBZSG-PL-110	bronze with smoked	110 - 130V
GAIWAOBZHF-PL-110	bronze with smoked hand formed glass	110 - 130V
GAIWAOSBMO-PL-110	satin brass with matt opal	110 - 130V
GAIWAOSBOG-PL-110	satin brass with shiny opal	110 - 130V
GAIWAOSBSG-PL-110	satin brass with smoked	110 - 130V
GAIWAOSBHF-PL-110	satin brass with smoked hand formed glass	110 - 130V



CTQLIGHTING

GAIA WALL - WALL PLATE - DALI-A

FINISH

bronze with matt opal glass bronze with shiny opal glass bronze with smoked glass bronze with smoked hand formed glass satin brass with matt opal glass satin brass with shiny opal glass satin brass with smoked glass shade satin brass with smoked hand formed glass

DIMENSIONS (body of fixture)

150 x 190 x 183 mm (w x d x h)

WEIGHT

1.5kg (3.3lbs)

ILLUMINATION

220-240v - 1 x E14 - 25w max (or 4.5w 2700k LED) DALI converter to be installed in the cavity

DIMMING


dimmable bulb required DALI compatible

WALL ROSE / PLATE


round wall plate - ø 114 x 5 mm (dia x d)

CERTIFICATION



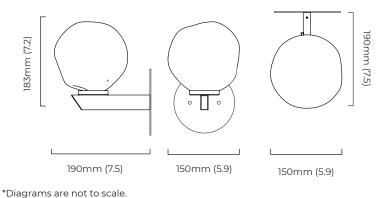


cover plate dimensions



DALI converter dimensions

60mm (2.4)



SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
GAIWAOBZMO-PL-DALIA-240	bronze with matt opal glass	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
GAIWAOBZOG-PL-DALIA-240	bronze with shiny opal glass	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
GAIWAOBZSG-PL-DALIA-240	bronze with smoked glass	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
GAIWAOBZHF-PL-DALIA-240	bronze with smoked hand formed glass	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
GAIWAOSBMO-PL-DALIA-240	satin brass with matt opal glass	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
GAIWAOSBOG-PL-DALIA-240	satin brass with shiny opal glass	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
GAIWAOSBSG-PL-DALIA-240	satin brass with smoked glass	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
GAIWAOSBHF-PL-DALIA-240	satin brass with smoked hand formed glass	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

