

Suspended light fittings - Mood lighting

® three-dimensional trademark





Design: Sammode Studio

# Tubular suspended light fitting for mood lighting

#### Light design

• Choice of 3 different reflectors in anodised aluminium (silver, coppery, golden)

#### Housing

- Ø100 mm diffuser in borosilicate glass
- End caps 1/2 ring press-formed in 304L stainless steel
- Gaskets moulded in EPDM
- Cable entry with nickel-coated brass cable gland for cable Ø5 14 mm

#### **Gear tray**

- Stainless steel gear tray with 2 porcelain E14 sockets
- Including 2 clear E14 LED filament lamps (3W, 2700K)
- Internal wiring with silicone isolated wires braided with glass fibre

### Reflectors

• Range of reflectors in anodised aluminium sheeting: silver, coppery, golden

Electrical class	Class I
Supply voltage	220/240V 50Hz
Sealing	IP66, IP68 and IP69K
Shock resistance	IK07
Operating temperature	-20°C +30°C




# Installation

- Connection to a 3x2.5 mm<sup>2</sup> terminal block
- Fixing with 2 reinforced spring-loaded stainless steel straps with variable centre distance and allowing 360° orientation
- Provided with 2 suspension kits including each a ceiling attachment system, 3 m steel cord (Ø1.2 mm) and a self-locking adjustable strap fixing system

# Easy maintenance

 Maintenance by releasing the 2 closing screws, removing the end caps and sliding the gear tray

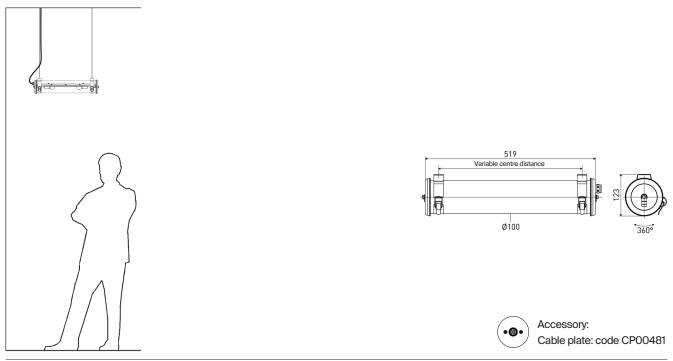

# Principal part numbers

Power	Designation	Part No.	Optics	Weight (kg)
	Reflector in mirror-finish aluminium - Silver			
2x3W	MUSSET 827 PY 113LN SIL SUSP	1522 0040		2.7
	Reflector in mirror-finish aluminium - Copper			
2x3W	MUSSET 827 PY 113LN COP SUSP	1522 0050		2.7
	Reflector in mirror-finish aluminium - Gold			
2x3W	MUSSET 827 PY 113LN GOL SUSP	1522 0060		2.7