STORM SYSTEM®

STORM MEDIUM PRODUCT CONFIGURATION

This diagram is a guide for the configuration of a Storm fixture. See the products datasheet, for more infomation about the individual products requirements and accessories

PLASTER CEILING ACOUSTIC PLASTER CEILING WOODEN SLATTED CEILING METAL CEILING WOOD CEILING or any screwfast surface STORM PLASTER RING STORM PLASTER RING BACK-MOUNTED RING BACK-MOUNTED RING BACK-MOUNTED RING STORM PLASTER RING + FRONT RING STORM EXTENSION S150 / S350 STORM EXTENSION S150 / S350 STORM EXTENSION \$150 / \$350 STORM EXTENSION \$150 / \$350 STORM EXTENSION S150 / S350 STORM PLASTER RING WITH CABINET FOR SOUND STORM PLASTER RING WITH CABINET FOR SOUND BACK-MOUNTED RING WITH CABINET FOR SOUND BACK-MOUNTED RING WITH CABINET FOR SOUND BACK-MOUNTED RING WITH CABINET FOR SOUND

CHOOSE YOUR INSTALLATION RING

What kind of ceiling do you have and do you have enough ceiling depth?

See your chosen products technical datasheet

(only for AIR IN & AIR OUT & CABINET)



ventilation tube in place (for Air In and Air Out). It also holds the Storm Cabinet in place when the Back-Mounted Ring is used.

STORM PLASTER RING ADAPTOR (only for PLASTER RING)



The Storm Plaster Ring Adaptor makes the plastering process easier and limits the amount of plaster needed, whilst ensuring a flush installation with the surface.

STORM EXTENSION BASIC



For ceilings with a minimum of build-in depth. By using an extension fixture you will be able to extend the light as well as always keep safety distances. Storm Output N/A.



STORM CABINET

The cabinet reduces the horizontal safety

distance, and can be installed directly into the ceilings insulation. Suitable for Storm

Plaster Ring and Storm Back-Mounted Ring

(when combined with Storm Back-Mounted Adaptor)

OPTIONAL ACCESSORIES

STORM BACK-MOUNTED ADAPTOR


The Storm Back-Mounted Adaptor keeps the





STORM SYSTEM®

STORM MEDIUM PRODUCT CONFIGURATION CHOOSE A PRODUCT This diagram is a guide for the configuration of a Storm fixture. See the products datasheet, for more infomation about the individual products requirements and accessories LIGHT MOTION SMOKE COVER SOUND CAM AIR Ô O Ø Ċ, Ø AIR IN AIR OUT BASE SHORT LONG E27 OUT LONG 25 HOOK MOON Ô G (0) DIRECT SHORT 25 SUN (b) CHOOSE A TUBE SUPPLEMENT CHOOSE A MOTION KIT WITH LIGHT BULB BASE TUBE based on your installation MASTER SLAVE KNX SUPPLEMENT 6 WITH A 5 LIGHT SOURCE KNX/TEMP DALI BMS - supplement with a driver if constant current is chosen CHOOSE VERSION: CHOOSE A LIGHT KIT 6 6 DIM TO WARM based on your installation DIMMABLE CHOOSE CURRENT - driver included GU10 230V CONSTANT CURRENT (mA) 230V SUPPLY: GU10 230V CONSTANT CURRENT MP (- supplement with a driver if constant current is chosen SUPPLEMENT WITH A LIGHT SOURCE supplement with a driver if constant current is chosen FINISH

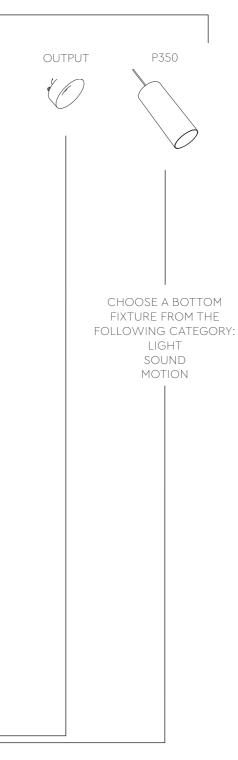



STORM SYSTEM®

STORM SMALL PRODUCT CONFIGURATION

This diagram is a guide for the configuration of a Storm fixture. See the products datasheet, for more infomation about the individual products requirements and accessories

CHOOSE YOUR INSTALLATION RING

What kind of ceiling do you have and do you have enough ceiling depth? See your chosen products technical datasheet

