



Options and accessories :



Coal finish
End caps & fixing straps



Aluminium gear unit cover
S G C B P



Pre-cabling
braided tinned copper





Pre-cabling
with cable plate kit



Fixing straps with HSHC
screw or Torx screw

Gounod Ø133

Vertical wall light fitting for directional lighting	
Lumen output	2700 to 4500 lm
Length	995 to 1595 mm

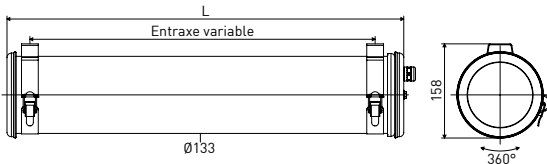

Principal part numbers

Reflectors	Lumen(lm)	L(mm)	T(K)	Designation	Code	Cons.(W)
Silver						
	2700	995	3000	GOUNOD 133 S 995 2700-830	16556040	31
	3600	1295		GOUNOD 133 S 1295 3600-830	16556050	41
	4500	1595		GOUNOD 133 S 1595 4500-830	16556060	51
Copper						
	2700	995	3000	GOUNOD 133 C 995 2700-830	16557105	31
	3600	1295		GOUNOD 133 C 1295 3600-830	16557106	41
	4500	1595		GOUNOD 133 C 1595 4500-830	16557107	51
Gold						
	2700	995	3000	GOUNOD 133 G 995 2700-830	16557108	31
	3600	1295		GOUNOD 133 G 1295 3600-830	16557109	41
	4500	1595		GOUNOD 133 G 1595 4500-830	16557110	51
Brass						
	2700	995	3000	GOUNOD 133 B 995 2700-830	16557111	31
	3600	1295		GOUNOD 133 B 1295 3600-830	16557112	41
	4500	1595		GOUNOD 133 B 1595 4500-830	16557113	51
Petrol						
	2700	995	3000	GOUNOD 133 P 995 2700-830	16557114	47
	3600	1295		GOUNOD 133 P 1295 3600-830	16557115	61
	4500	1595		GOUNOD 133 P 1595 4500-830	16557116	76

Technical Data

Power supply	220-240 V 50/60Hz
Electrical class	Class II
Operating temperature	-25°C to +35°C
Imperviousness	IP66, IP68, IP69K
Shock resistance	IK10
Fire resistance	650°C




Options

Finishes	
End caps & straps painted Coal	COAL
RAL7021	
Aluminium gear unit cover	CRS/C/G/B/P
Silver/Copper/Gold/Brass/Petrol	
Color temperature	
2700K	827
4000K	840
Lighting management (5 wires)	
Electronic gear unit for DALI dimming	RD
Electronic gear unit for push button	RS
Switch-off warning function (for sensor/timer)	RC
Electrical Class	
Class I	CL1
Materials	
Polycarbonate housing (960°C)	PO
End caps & fixing straps 316L stainless steel	MR
Fixings	
Fixing straps with HSHC screw	BRV
Fixing straps with tamper-resistant Torx screw	BRVT

Accessories

Stainless steel cable plate kit (IP40)	CPO0481
Pre-cabling 1m 3G1.5 (3 wires)	CAB0007
Braided tinned copper cable	
Pre-cabling 1m 5G1.5 (5 wires)	CAB0010
Braided tinned copper cable	

Photometry

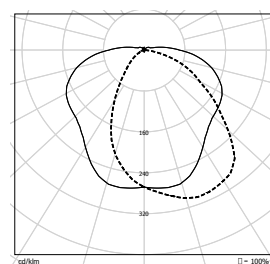

ULR=32%

Specifications

Technical Data	
Light source	<ul style="list-style-type: none"> High-efficiency removable LED modules (CRI>80, 3 SDCM) 50 000h L80/B10 at 25°C Photobiological safety: no risk (Group 0)
Optics	<ul style="list-style-type: none"> Longitudinal louvre in brushed aluminium with inclined lamina Specific satin-finish primary optics
Heat management	Passive heat sink in aluminium
Control gear	Constant current driver (non-dimmable)
Rapid installation	
Connection	<ul style="list-style-type: none"> With nickel-coated brass cable gland for cable Ø 5-14 mm To a 3 x 2,5 mm² disconnectable terminal block Installation in vertical position: cable gland positioned downwards
Closing	Quick closing with just one screw
Fixings	2 stainless steel fixing straps (with variable centre distance)
Easy maintenance	
LED engine maintenance	<ul style="list-style-type: none"> Quick opening and closing with just one screw Patented sliding maintenance system Easily removable LED modules and driver
Materials and finishes	
Gear tray	Internal grey powder coated steel gear tray RAL 9006
Housing	Coextruded polycarbonate/PMMA diameter 133 for indoor and outdoor
End caps, fixing straps	304L stainless steel
Gaskets	Moulded EPDM gaskets