

Options and accessories :



Coal finish  
End caps & fixing straps




Aluminium gear unit cover  
S G C B P



Pre-cabling  
braided tinned copper cable



Pre-cabling  
with cable plate kit




Horizontal suspension kit





Fixing straps with HSHC  
screw or Torx screw

# Pissarro Ø100

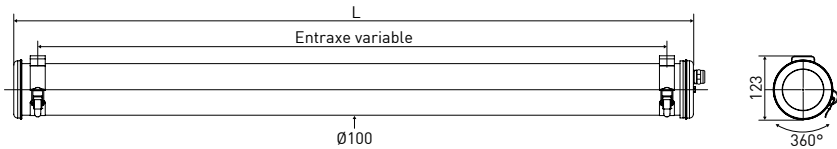

Ceiling light fitting with longitudinal louvre	
Lumen output	2100 to 3500 lm
Length	1018 to 1618 mm
UGR 90°	≤ 25

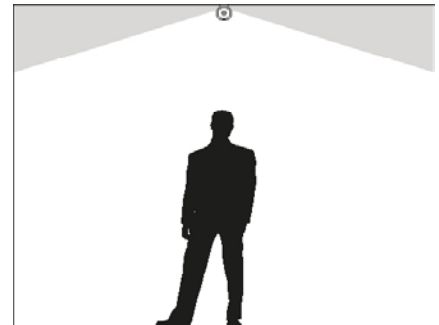

## Principal part numbers

Reflectors	Lumen(lm)	L(mm)	T(K)	Designation	Code	Cons.(W)
<b>Silver</b>						
	2100	1018	3000	PISSARRO 100 S 1018 2100-830	15847040	24
	2800	1318		PISSARRO 100 S 1318 2800-830	15847050	32
	3500	1618		PISSARRO 100 S 1618 3500-830	15847060	39
<b>Copper</b>						
	2100	1018	3000	PISSARRO 100 C 1018 2100-830	15847104	24
	2800	1318		PISSARRO 100 C 1318 2800-830	15847105	32
	3500	1618		PISSARRO 100 C 1618 3500-830	15847106	39
<b>Gold</b>						
	2100	1018	3000	PISSARRO 100 G 1018 2100-830	15847107	24
	2800	1318		PISSARRO 100 G 1318 2800-830	15847108	32
	3500	1618		PISSARRO 100 G 1618 3500-830	15847109	39
<b>Brass</b>						
	2100	1018	3000	PISSARRO 100 B 1018 2100-830	15847110	24
	2800	1318		PISSARRO 100 B 1318 2800-830	15847111	32
	3500	1618		PISSARRO 100 B 1618 3500-830	15847112	39
<b>Petrol</b>						
	2100	1018	3000	PISSARRO 100 P 1018 2100-830	15847113	30
	2800	1318		PISSARRO 100 P 1318 2800-830	15847114	40
	3500	1618		PISSARRO 100 P 1618 3500-830	15847115	49

## Technical Data

Power supply	220-240 V 50/60Hz
Electrical class	Class II
Operating temperature	-25°C to +35°C
Imperviousness	IP66, IP68, IP69K
Shock resistance	IK10
Fire resistance	650°C




## Options

Finishes	
End caps & straps painted Coal	COAL
RAL7021	
Aluminium gear unit cover	CRS/C/G/B/P
Silver/Copper/Gold/Brass/Petrol	
Color temperature	
2700K	827
4000K	840
Lighting management (5 wires)	
Electronic gear unit for DALI dimming	RD
Electronic gear unit for push button	RS
Switch-off warning function (for sensor/timer)	RC
Electrical Class	
Class I	CL1
Materials	
Polycarbonate housing (960°C)	PO
End caps & fixing straps 316L stainless steel	MR
Fixings	
Fixing straps with HSHC screw	BRV
Fixing straps with tamper-resistant Torx screw	BRVT

## Accessories

Stainless steel cable plate kit (IP40)	CP00481
Horizontal suspension kit (3m ropes)	17500050
Pre-cabing 1m 3G1.5 (3 wires)	CAB0007
Braided tinned copper cable	
Pre-cabing 1m 5G1.5 (5 wires)	CAB0010
Braided tinned copper cable	

## Photometry



ULR= 3%

## Specifications

Technical Data	
Light source	<ul style="list-style-type: none"> <li>High-efficiency removable LED modules (CRI&gt;80, 3 SDCM)</li> <li>50 000h L80/B10 at 25°C</li> <li>Photobiological safety: no risk (Group 0)</li> </ul>
Optics	<ul style="list-style-type: none"> <li>Longitudinal louvre in brushed aluminium with lamina</li> <li>Specific satin-finish primary diffuser optics</li> </ul>
Light comfort	<ul style="list-style-type: none"> <li>Longitudinal brightness control</li> <li>Longitudinal glare control 40°</li> <li>UGR longitudinal ≤25</li> </ul>
Heat management	Passive heat sink in aluminium
Control gear	Constant current driver (non-dimmable)
Rapid installation	
Connection	<ul style="list-style-type: none"> <li>With nickel-coated brass cable gland for cable Ø 5-14 mm</li> <li>To a 3 x 2,5 mm<sup>2</sup> disconnectable terminal block</li> </ul>
Closing	Quick closing with just one screw
Fixings	2 stainless steel fixing straps (with variable centre distance)
Easy maintenance	
LED engine maintenance	<ul style="list-style-type: none"> <li>Quick opening and closing with just one screw</li> <li>Patented sliding maintenance system</li> <li>Easily removable LED modules and driver</li> </ul>
Materials and finishes	
Gear tray	Internal grey powder coated steel gear tray RAL 9006
Housing	Coextruded polycarbonate/PMMA diameter 100 for indoor and outdoor
End caps, fixing straps	304L stainless steel
Gaskets	Moulded EPDM gaskets