


rond 2.0 retrofit/easyfit/backfit socket type E

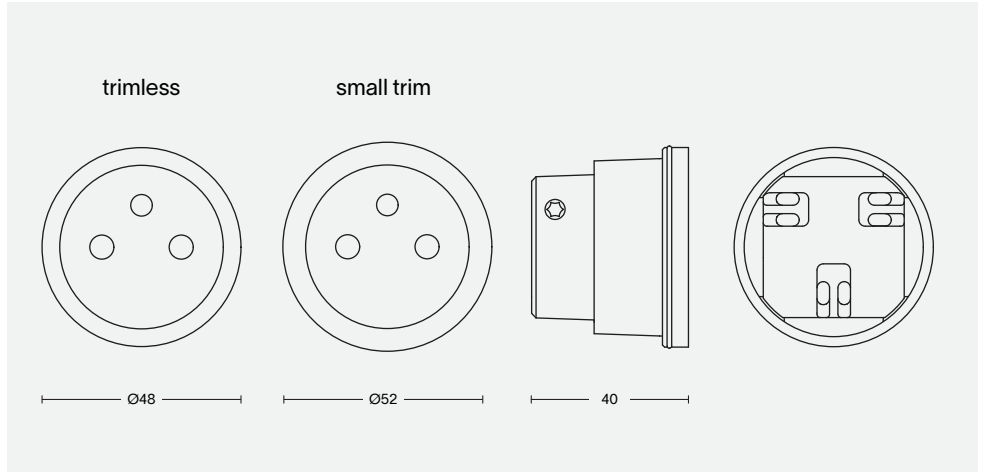

socket specs

| | | |
|-----------------------|--|------|
| application | 16A / 250V | |
| flush-mounting depth | 40 mm | |
| wire stripping length | 13.8 mm | |
| wire capacity | up to 4 x 2.5 mm ² per terminal | |
| wire fixation | screw terminals (TX8) | |
| ambient temperature | -5 till +40°C | |
| IP, IK rating | IP21-D | IK06 |
| marking | CE | |

accessories

installation

| | |
|-------------|------------------------------|
| 8800 - 2011 | retrofit plaster ring |
| 8800 - 2013 | easyfit plaster box - single |
| 8800 - 2014 | easyfit plaster box - double |
| 8800 - 2016 | backfit holder |
| 8800 - 2010 | removal tool |

order number

| | trimless | | small trim | |
|----------------------|-------------|-------------|-------------|-------------|
| | black cup | white cup | black cup | white cup |
| cover ring | | | | |
| basic black | 8800 - 2020 | - | 8800 - 2052 | - |
| basic white | - | 8800 - 2021 | - | 8800 - 2053 |
| black ano | 8800 - 2022 | - | 8800 - 2054 | - |
| white struc | - | 8800 - 2023 | - | 8800 - 2055 |
| brushed nickel | 8800 - 2030 | 8800 - 2024 | 8800 - 2062 | 8800 - 2056 |
| brushed brass | 8800 - 2031 | 8800 - 2025 | 8800 - 2063 | 8800 - 2057 |
| light bronze | 8800 - 2032 | 8800 - 2026 | 8800 - 2064 | 8800 - 2058 |
| dark bronze | 8800 - 2033 | 8800 - 2027 | 8800 - 2065 | 8800 - 2059 |
| canon de fusil light | 8800 - 2034 | 8800 - 2028 | 8800 - 2066 | 8800 - 2060 |
| canon de fusil dark | 8800 - 2035 | 8800 - 2029 | 8800 - 2067 | 8800 - 2061 |