



STORM SYSTEM®

The Storm Small Direct is part of the STORM SYSTEM® collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

The Storm Small Direct is a non-adjustable spot. A honeycomb louvre is placed inside the spot to avoid glaring.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk

STORM SMALL DIRECT CC

DATA

Collection	STORM SYSTEM®
Product	Storm Small Direct – Constant Current
Article no.	1A00.0104.xx04

SPECIFICATIONS

Weight	59 g
Material	Aluminium
IP protection grade	IP20
Labelling	CE
Safety distance	0,3m
Insulation class	Class III
Fixture finish	For xx-codes review STORM SYSTEM® – COLOUR CODES >
Supply	Constant Current LED max. 15W

ADDITIONAL REQUIREMENTS

Light Source MR16 LED (light source not included)
review CONFIGURATION >

For IES/LDT lux files review
STORM SYSTEM® – LUX FILES >


NOTE: when using honey combs the light output will fall with 30% in efficiency

This product shall always be powered by SELV LED driver, output voltage of this driver in open circuit must not exceed 60V. Do NOT cover the LED driver or locate LED driver on top of light fixture.

INSTALLATION DEPTH

The installation depth may vary depending on the chosen light source. Be aware – external driver location is recommended.

For specific light source conditions – review CONFIGURATION >



IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed.

Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

COMPONENTS

- Storm Small Direct
- Retaining ring
- Honey comb



PLEASE NOTE:

If the spring on the fixture is damaged, do not proceed installation – contact your dealer!


STORM SMALL DIRECT

ASSEMBLY INSTRUCTION

STEP 1


Connect the light source to the supply cable

BE ATTENTIVE! Make sure you are using the correct power supply according to the light source.




STEP 2

Place the honeycomb louvre in the fixture.




STEP 3

Place the bulb in the fixture.

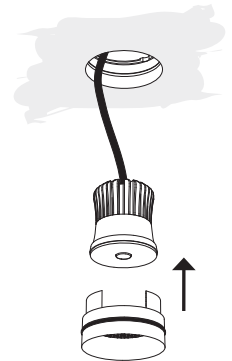

STEP 4



Mount the retaining ring using light pressure.



STEP 5

Mount the fixture into the plaster ring/back-mounted ring. Do this by slightly rotating the fixture into place.

NOTE: When rotating the fixture choose the direction with the least resistance.



IMPORTANT INFORMATION

Disassembly must be performed by a certified electrician only, and instructions must be followed.

WARRANTY:


If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

STORM SMALL DIRECT

DISASSEMBLY INSTRUCTION

STEP 1



Lightly push in the honeycomb, hereby creating space to take hold of the fixture.



STEP 2



Pull down gently, whilst slightly rotating.

NOTE: When rotating the fixture choose the direction with the least resistance.



STEP 3

Remove the retaining ring using light pressure.

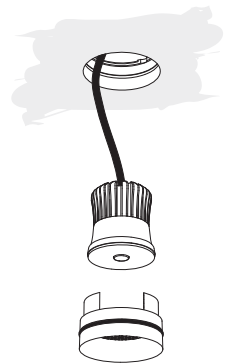

STEP 4

Disconnect the cables.

