


acrobat micro trimless short

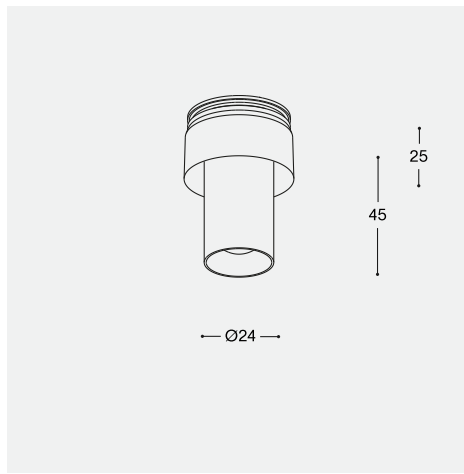

light specs

lamp	LED
reflector	lens
driver	excl.
IP	20
CRI	97
class	III

accessories

installation

8000 - 0004	plaster ring Ø38
8000 - 0104	adjustable plaster ring Ø38
8000 - 0014	clt csc ring Ø38
8000 - 0098	trimless tool Ø57 Ø38 jack

driver

8000 - 0032	DALI 1-10V dimmable driver 55W <small>for micro</small>
-------------	---

luminaire output

	2700K			3000K		
	10°	30°	50°	10°	30°	50°
1050mA (3.2W)	225 lm	225 lm	225 lm	250 lm	250 lm	250 lm

order number

	2700K			3000K		
	10°	30°	50°	10°	30°	50°
black ano.	8000-3345	8000-3457	8000-3681	8000-3346	8000-3458	8000-3682
white struc.	8000-3347	8000-3459	8000-3683	8000-3348	8000-3460	8000-3684