




light + motion | surface installation instruction

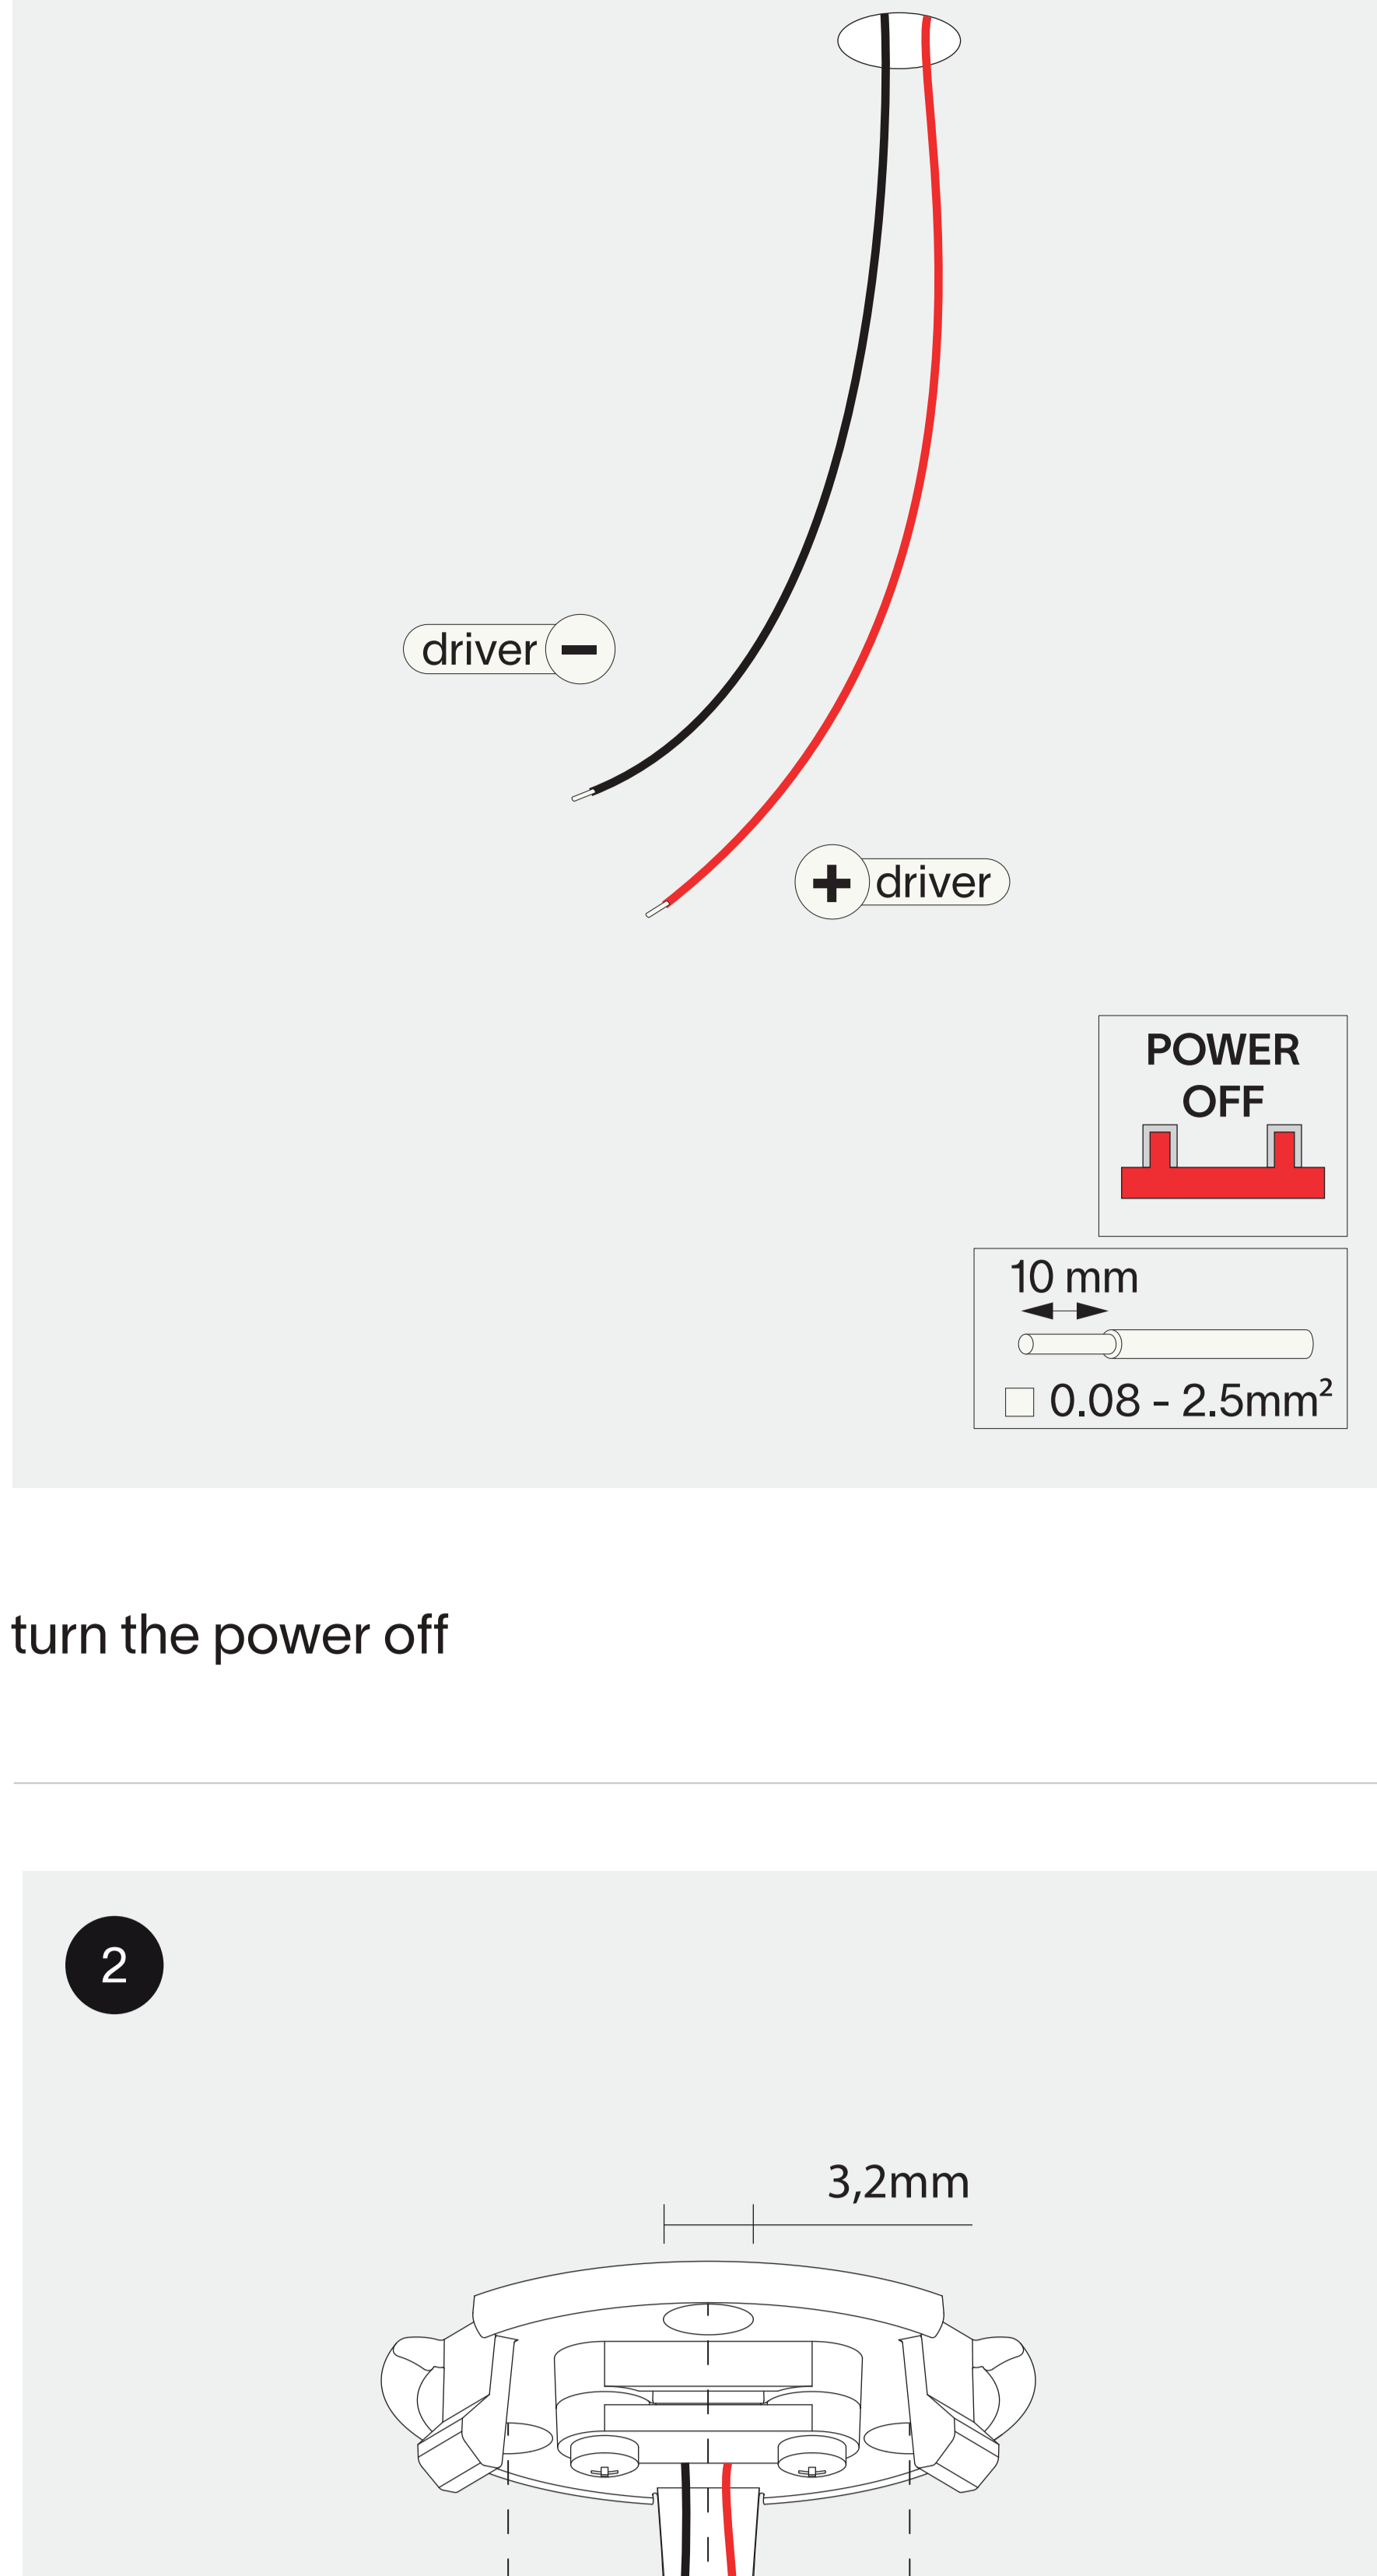


turn the power off

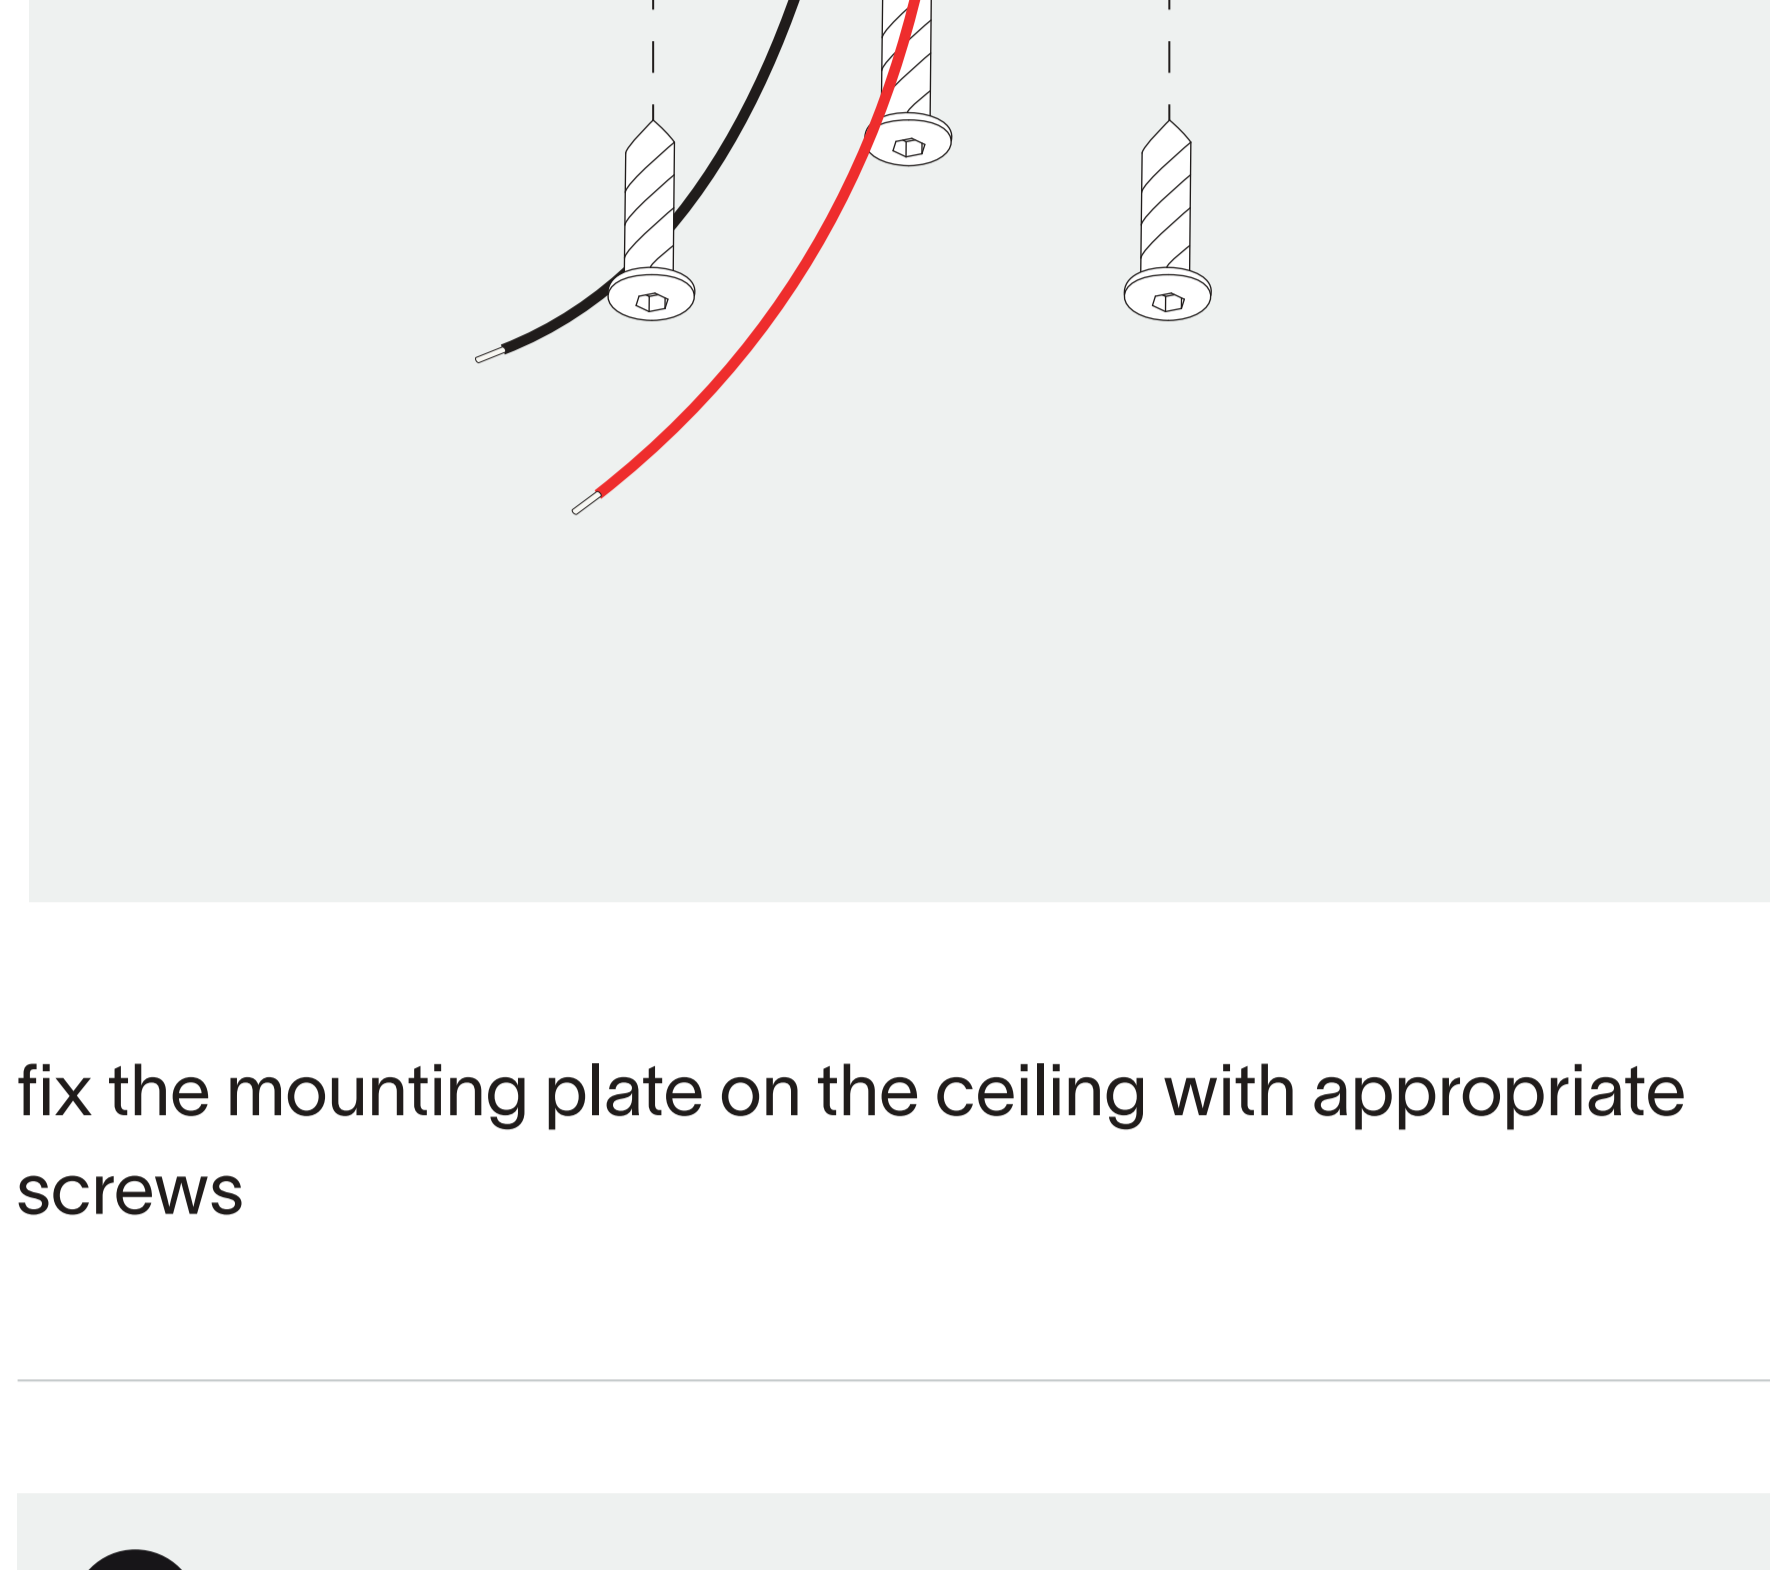


fix the mounting plate on the ceiling with appropriate screws

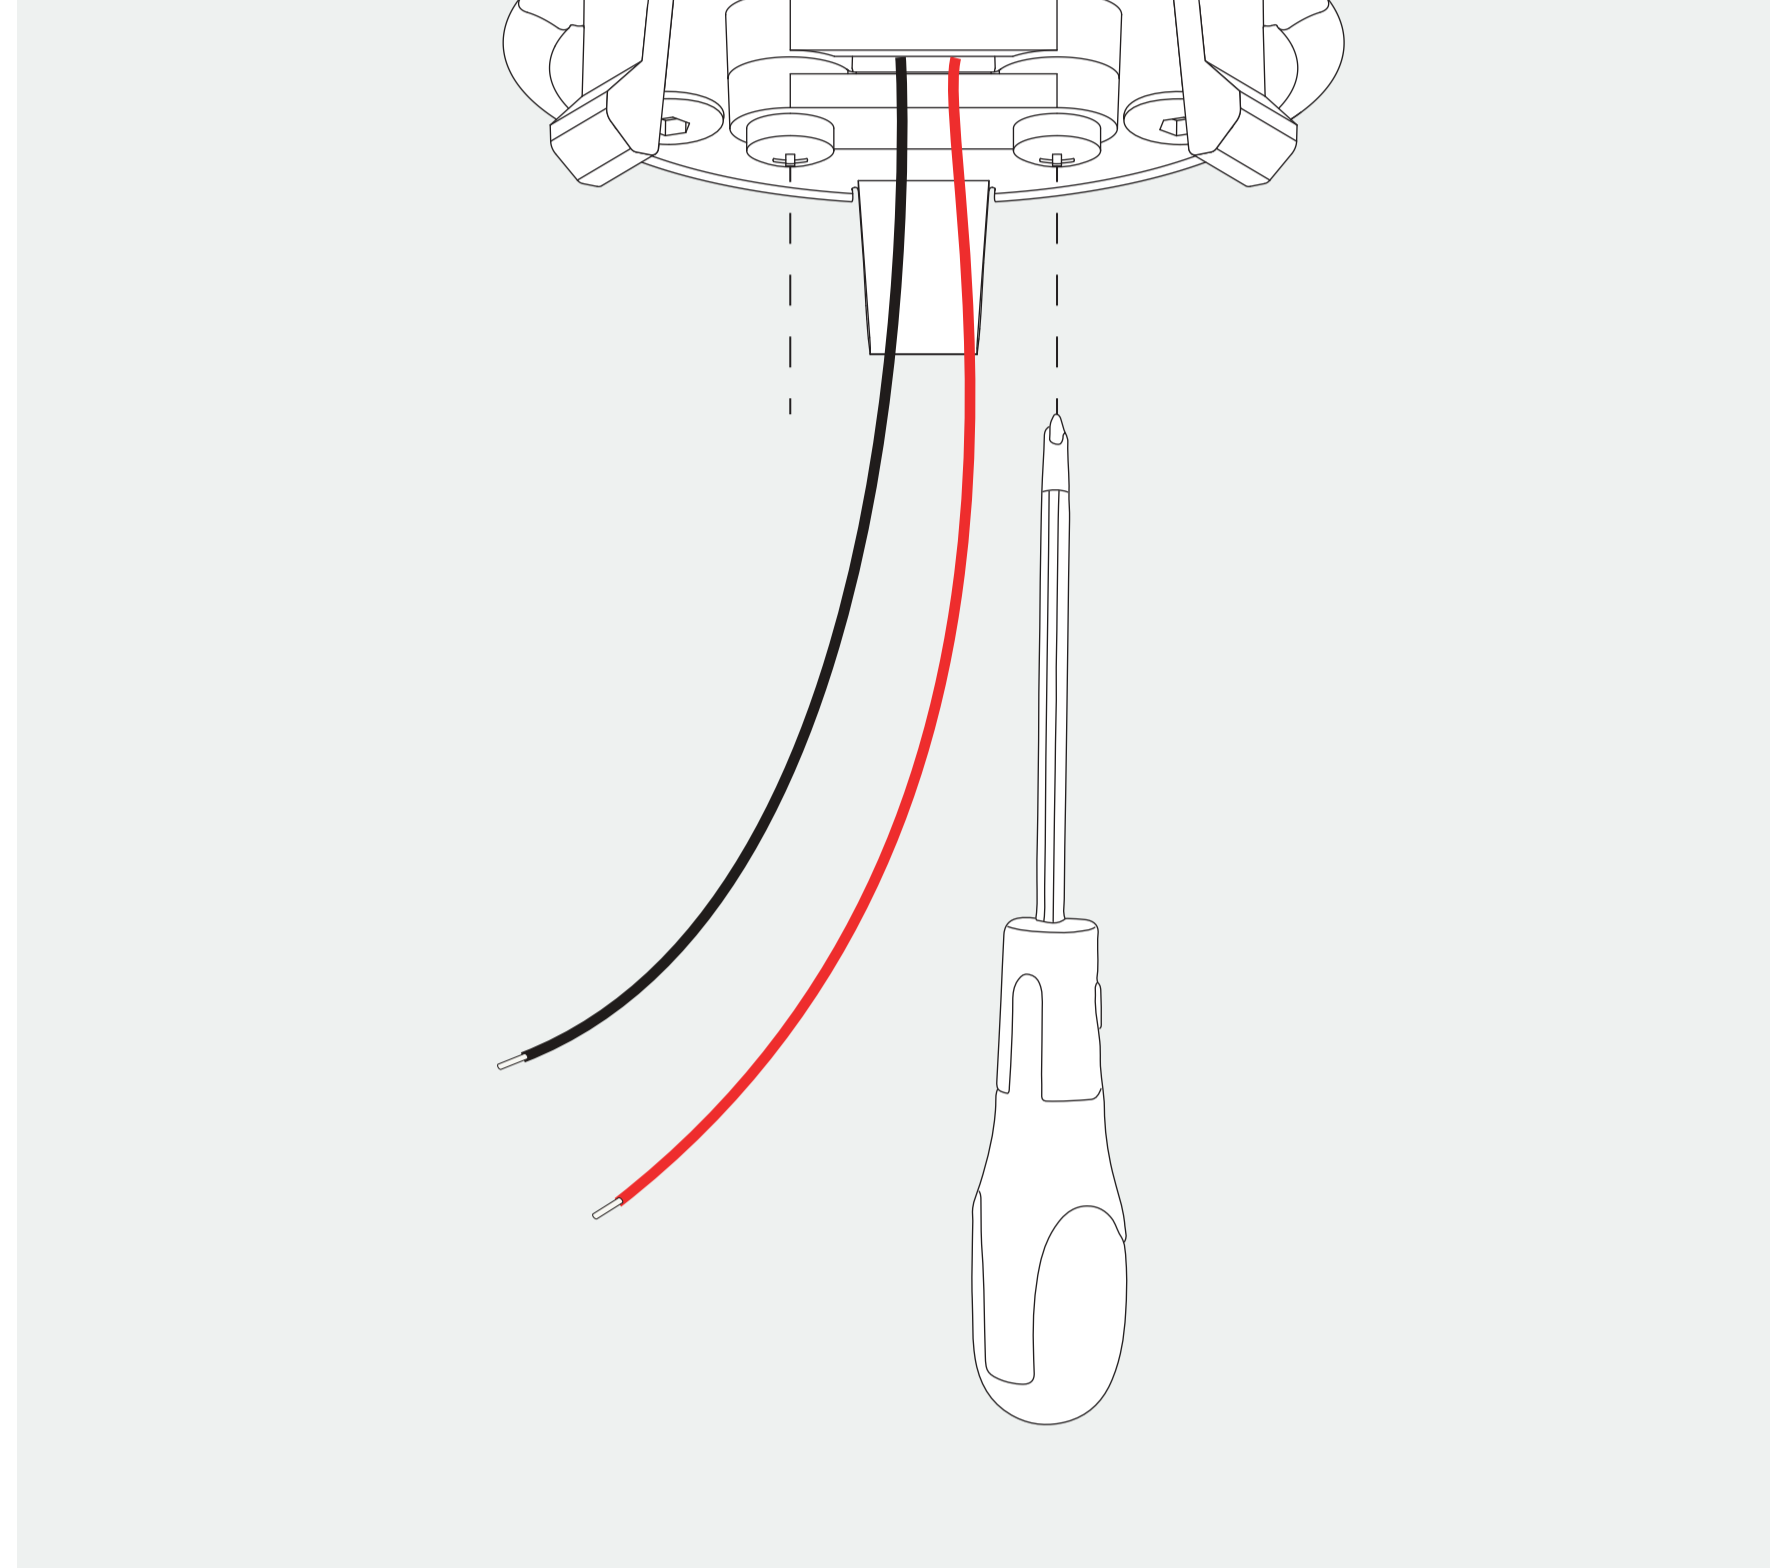

tighten the wires through the strain relief and cut off the excess wire

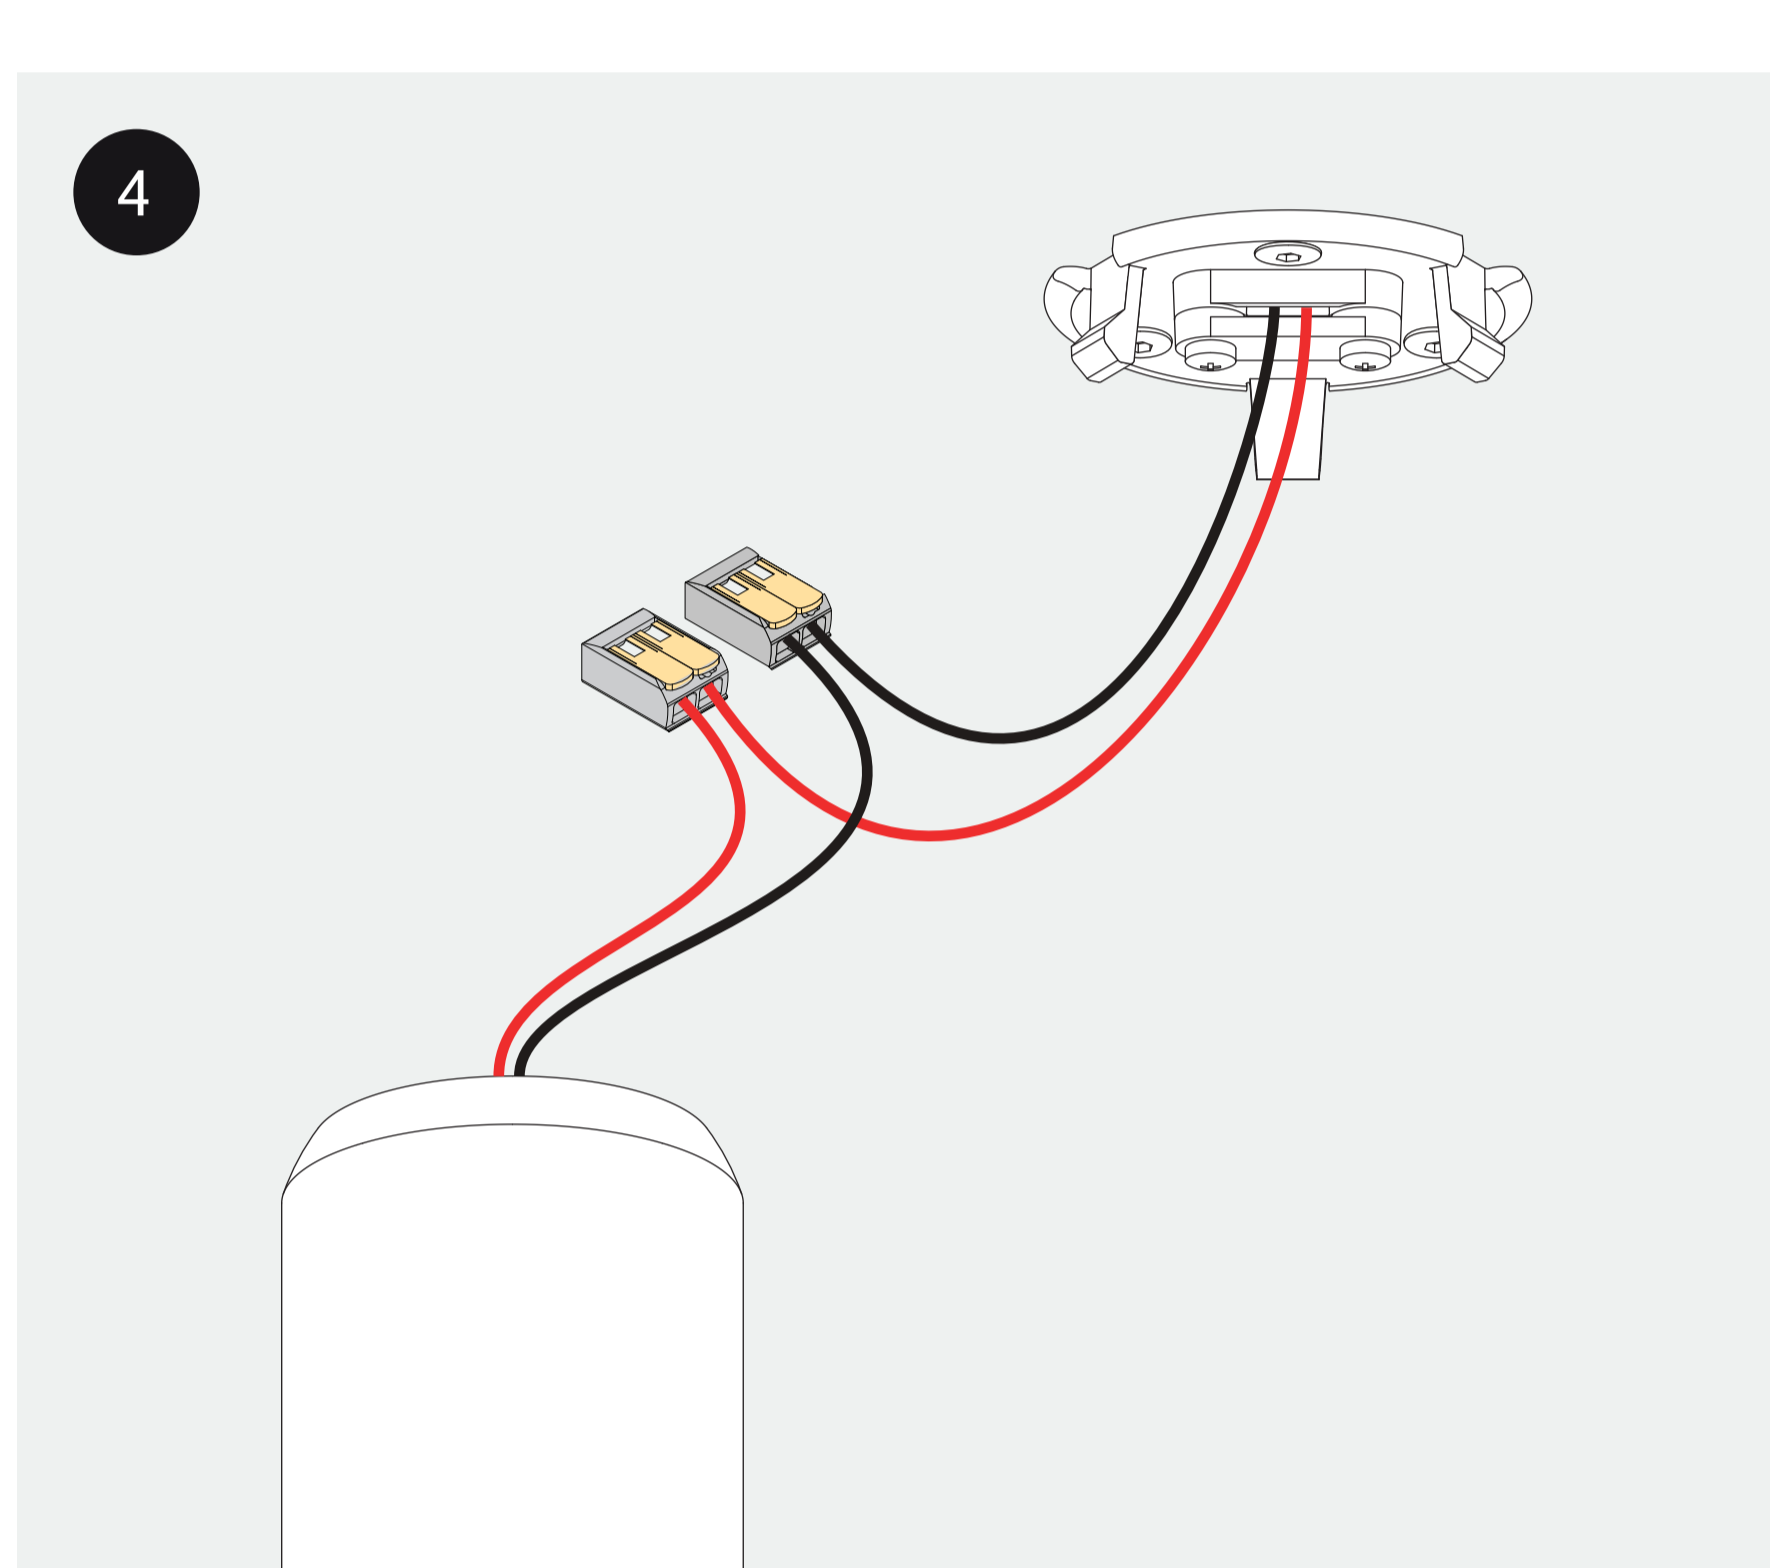

connect the wires with the wago connectors for parallel connection, respect polarity combine with prado LED-driver

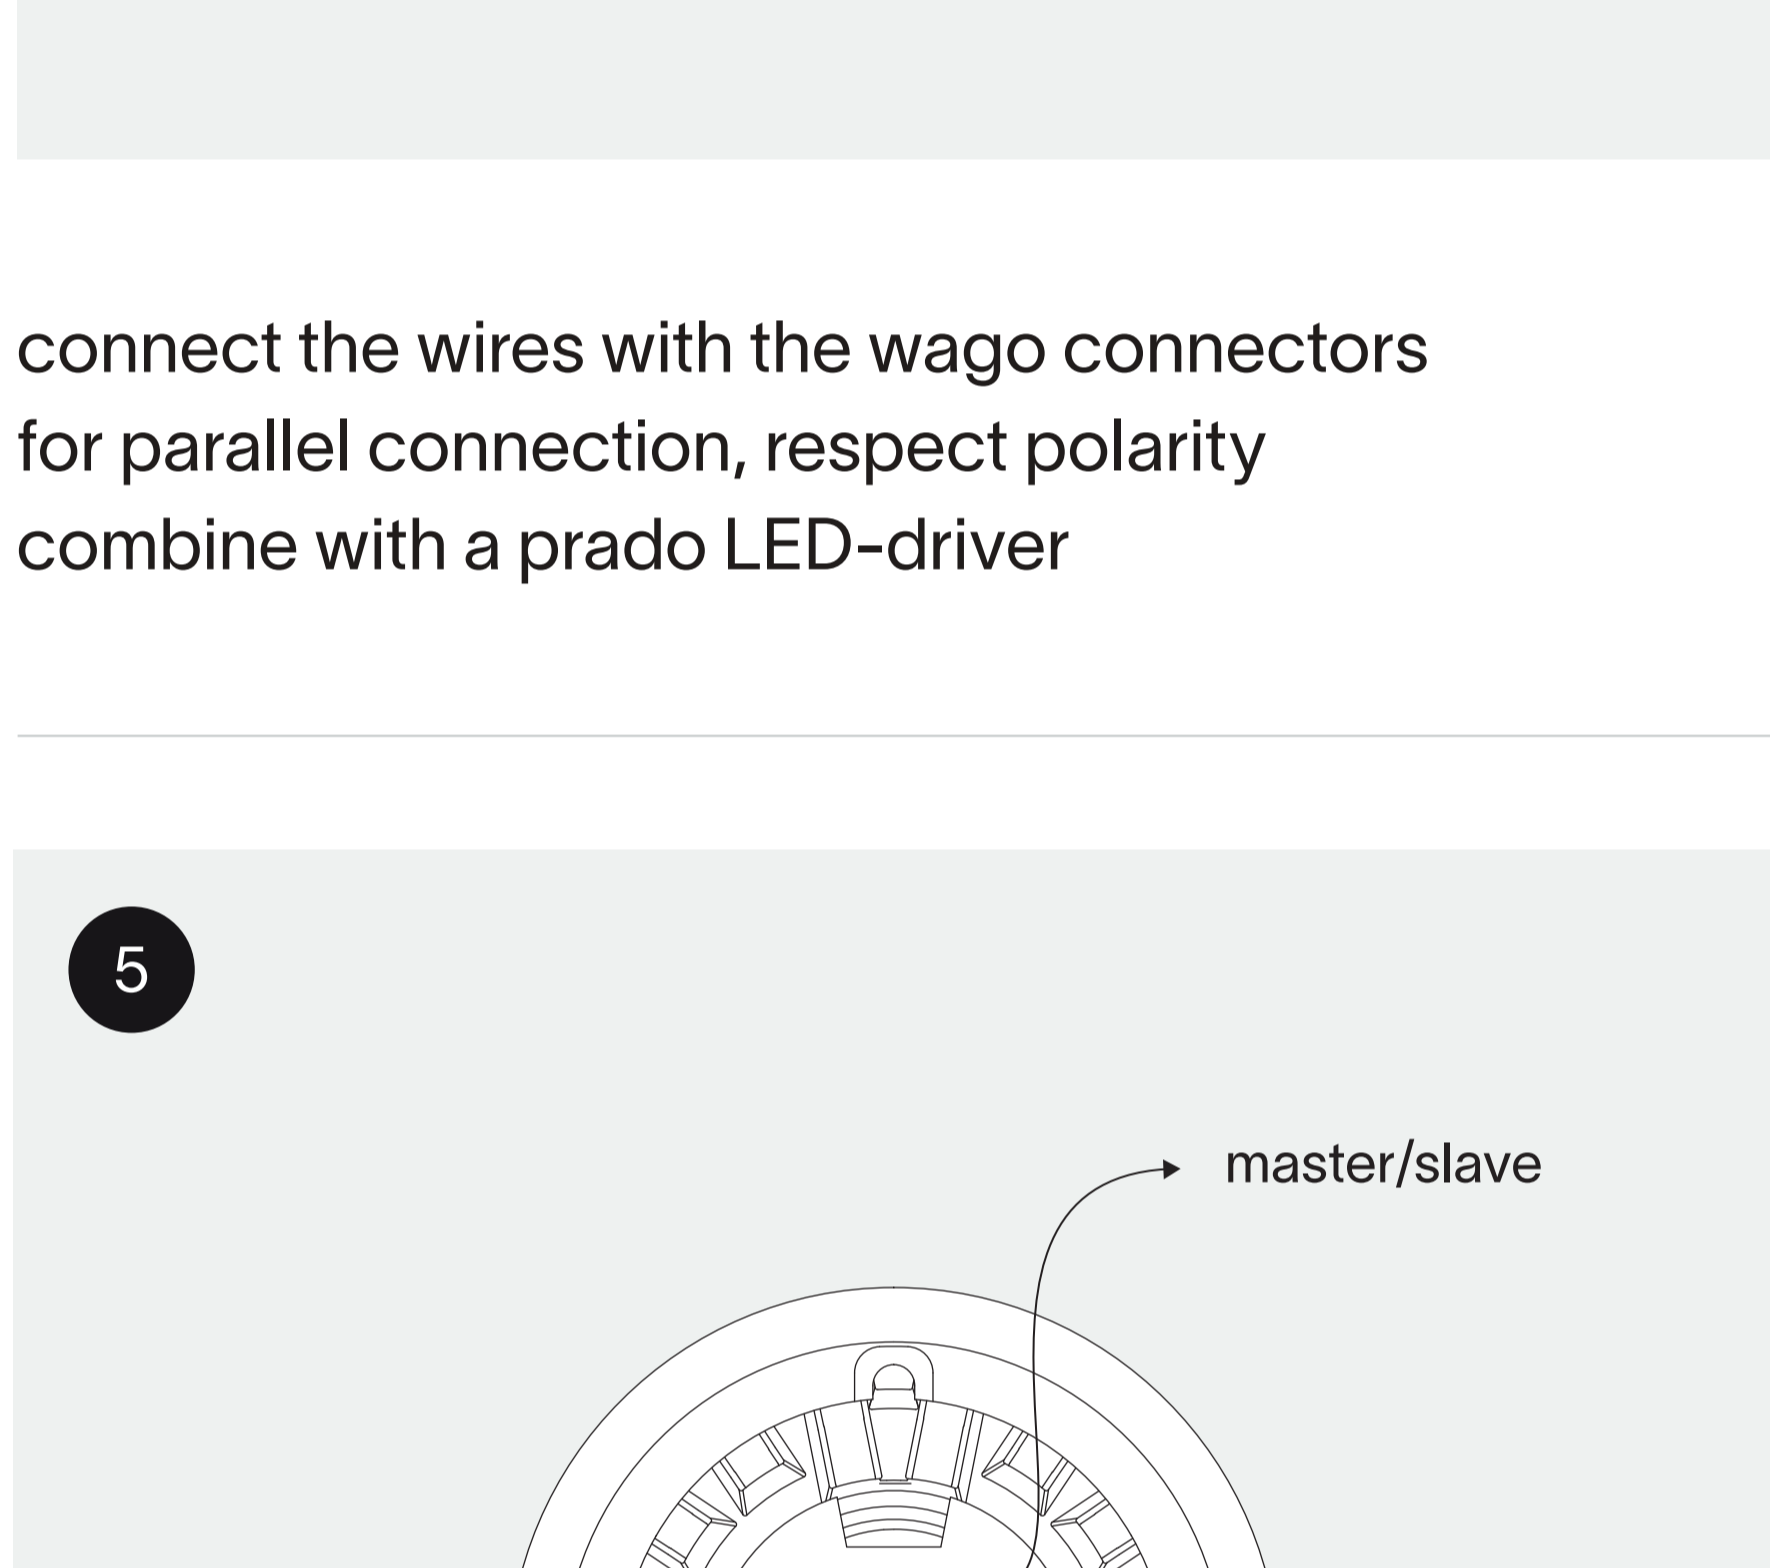


standard settings


- ambient light: 1700 LSB
- sensitivity: no pets detectable
- time on: 5min

if desired update standard settings with a screwdriver

| | |
|--|---|
| <p>T = short time on S = low sensitivity L = low ambient light</p> | <p>T = long time on S = high sensitivity L = high ambient light</p> |
|--|---|

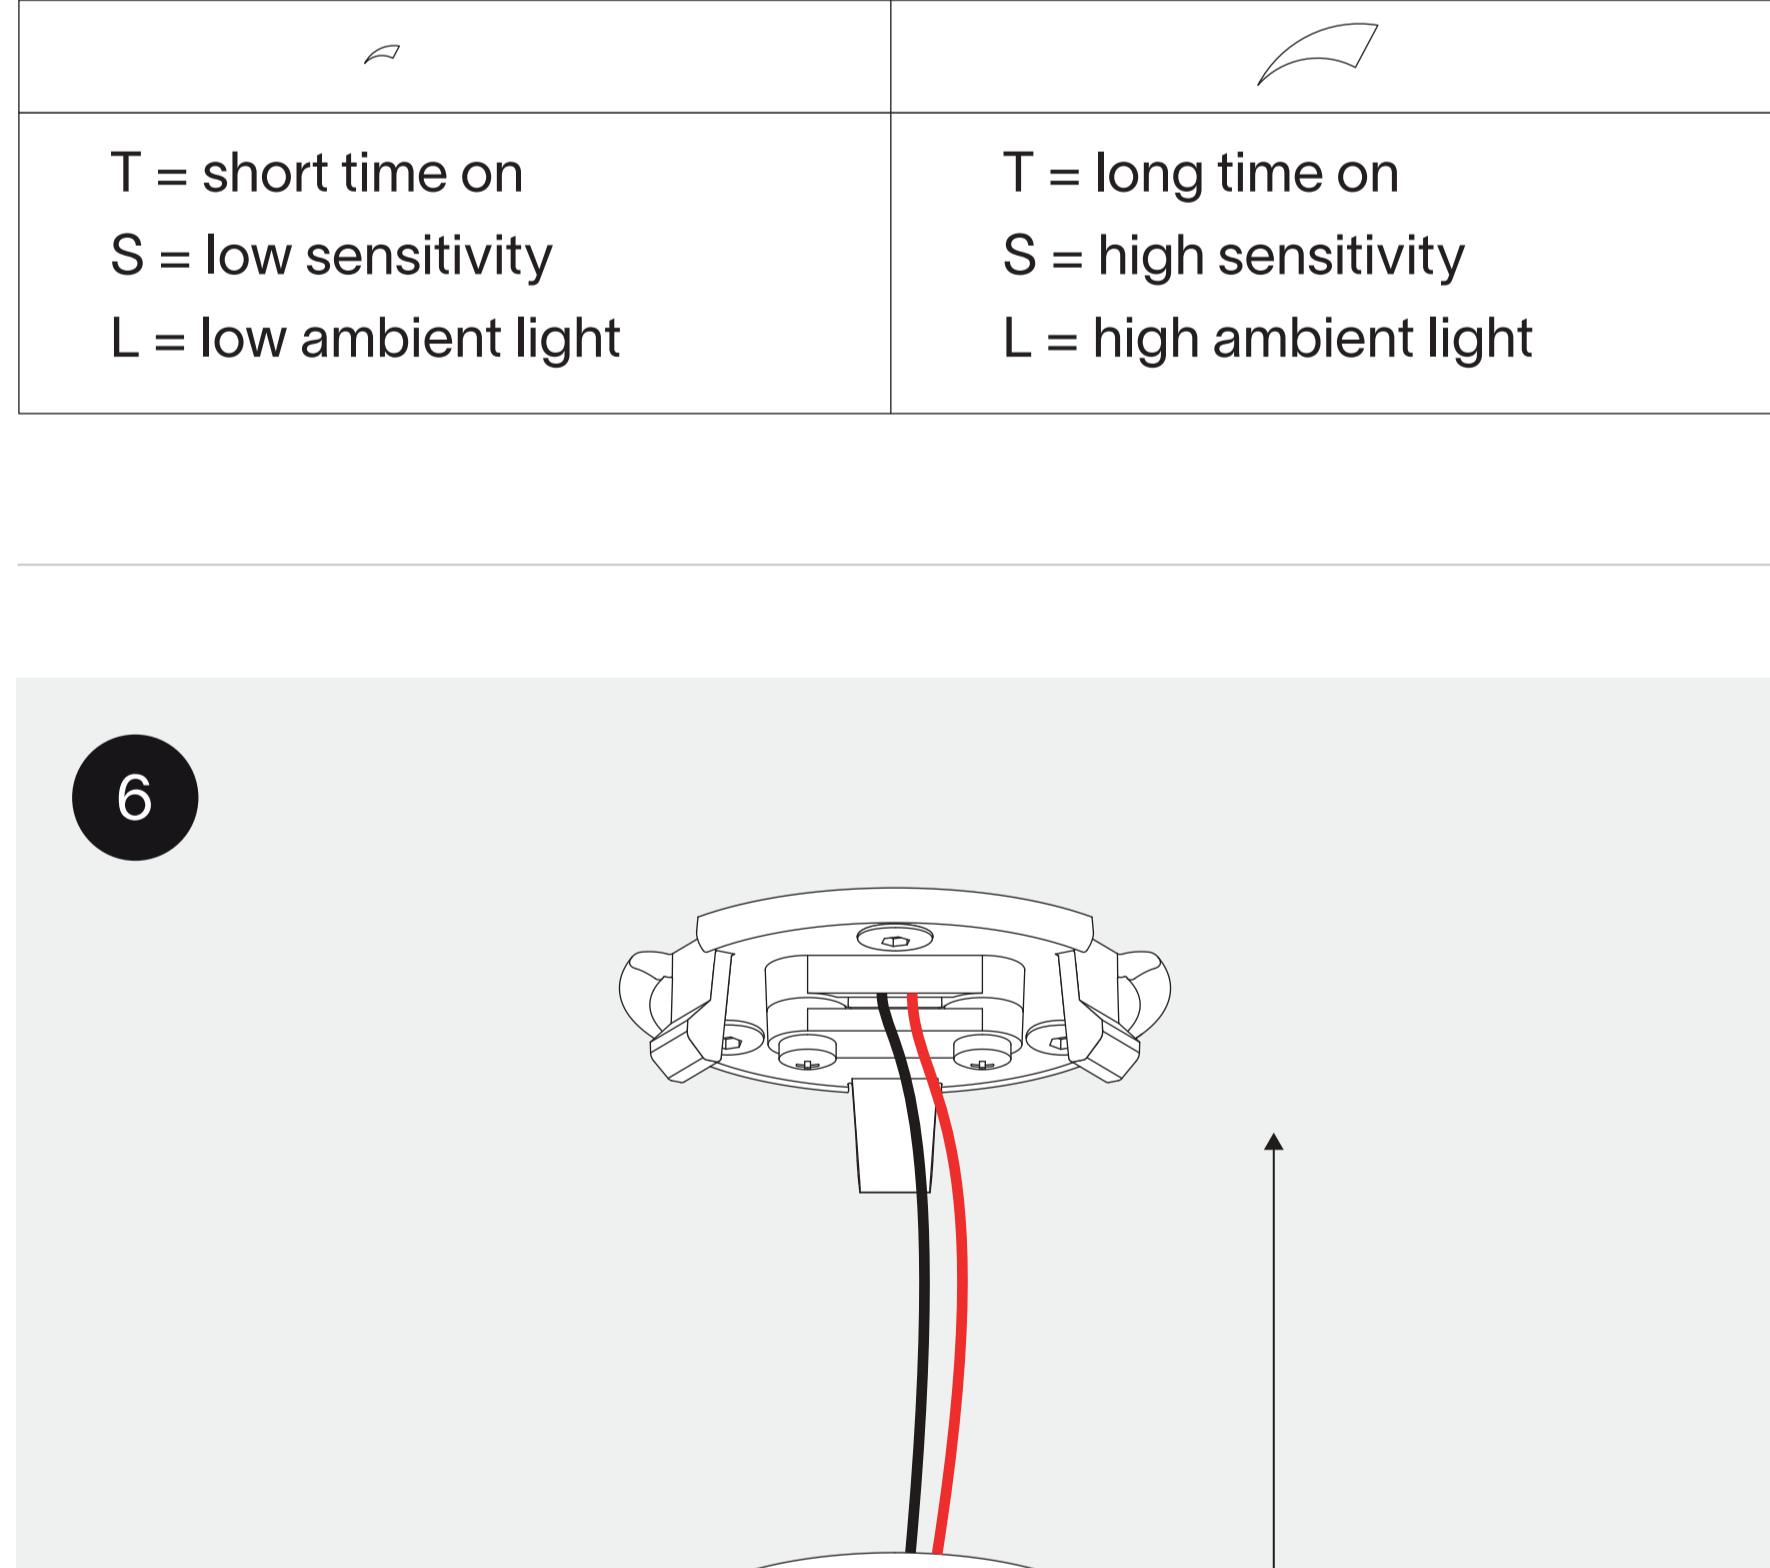

click the luminaire onto the connection plate

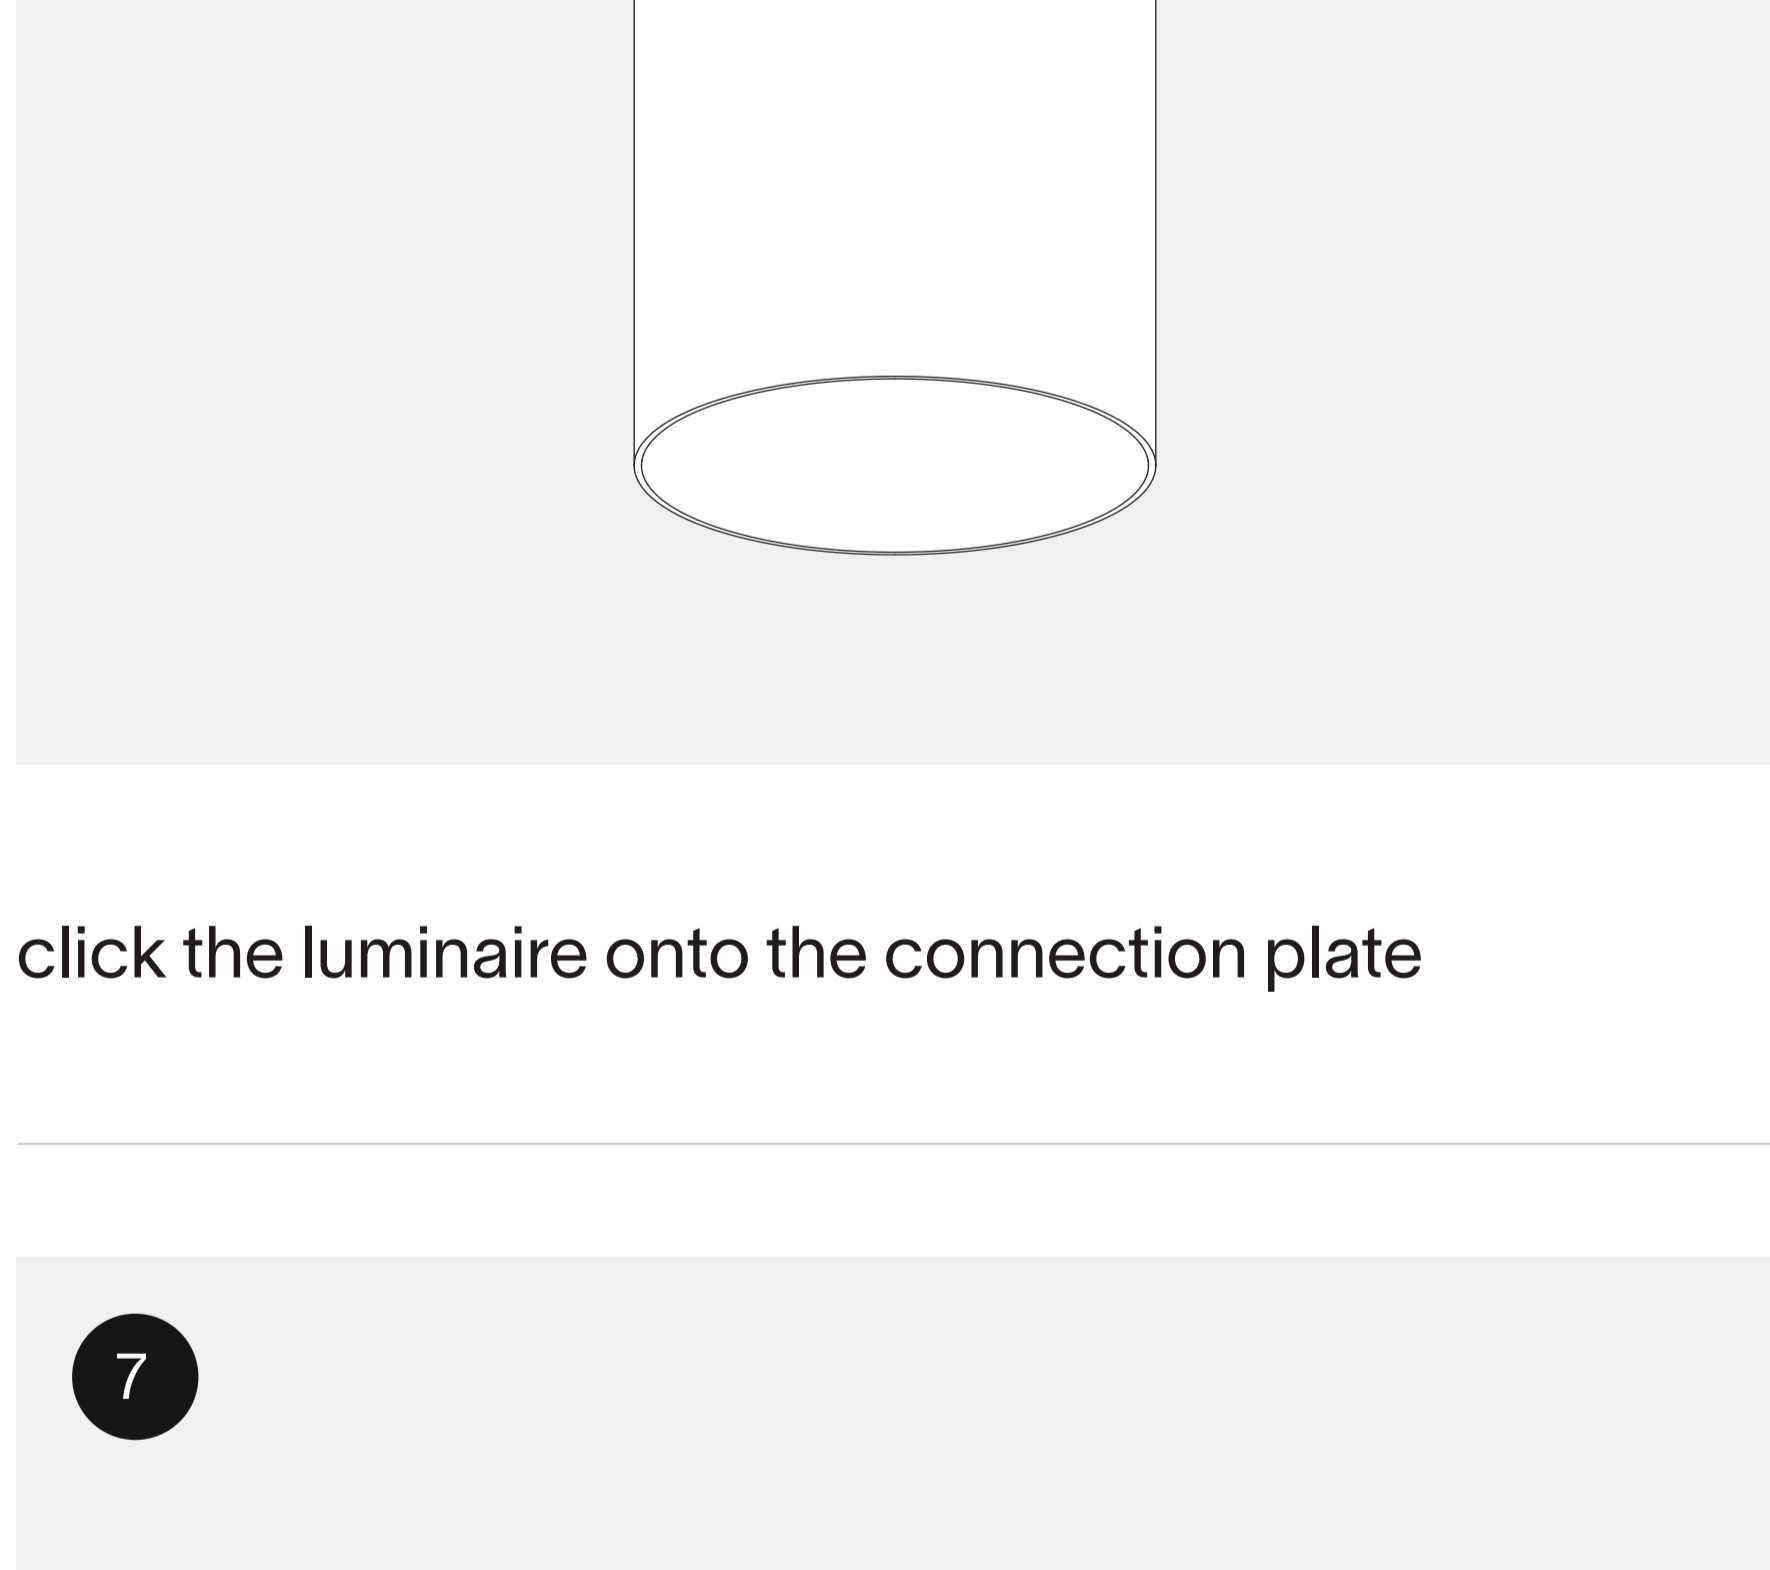

turn the power back on



for both maintenance and the adjustment of settings, the luminaire can gently be removed from the ceiling

thank you for choosing prado

