


trimless spot Ø57 short

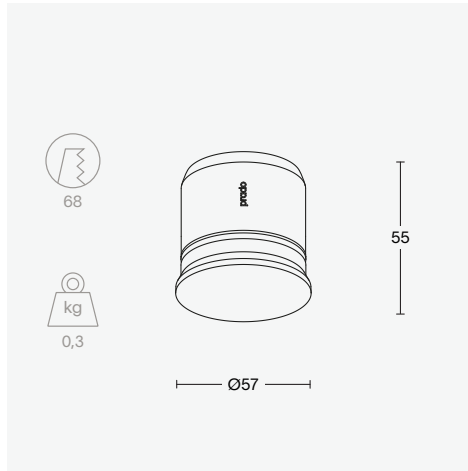

light specs

lamp	LED
optic	glass lens
driver	excluded
IP	↓ 65 ↑ 20
CRI	90+ / 97
class	III

luminaire output

	2700K		3000K	
	40°	60°	40°	60°
350mA (5.7W)	585 lm	585 lm	645 lm	645 lm
500mA (8.5W)	730 lm	730 lm	805 lm	805 lm

order number

	2700K		3000K	
	40°	60°	40°	60°
black ano.	8000-3105	8000-3123	8000-3106	8000-3124
white struc.	8000-3107	8000-3127	8000-3108	8000-3128

accessoires


installation

8000 - 0003	plaster ring Ø57
8000 - 0013	clt csc ring Ø57
8000 - 0103	adj. plaster ring Ø57
8000 - 0113	concrete ring + cap Ø57

drivers

8000 - 0021	DALI dimmable driver 38W
8000 - 0022	0-10V dimmable driver 36W
8000 - 0023	non-dimmable driver 42W
8000 - 0026	DALI dimmable driver 60W
8000 - 0027	DALI deep dim driver 20W

trimless spot Ø57 long

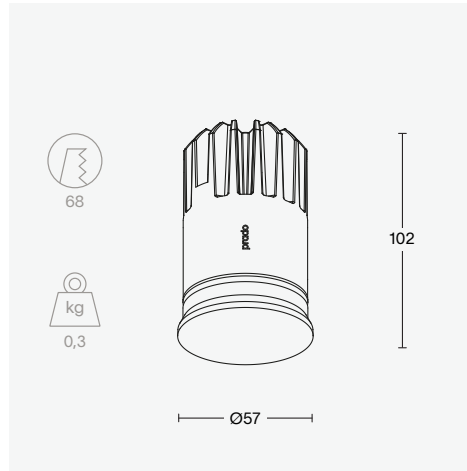

light specs

lamp	LED
optic	glass lens
driver	excluded
IP	↓ 65 ↑ 20
CRI	90+ / 97
class	III

accessories

installation

8000 - 0003	plaster ring Ø57
8000 - 0013	clt csc ring Ø57
8000 - 0103	adj. plaster ring Ø57
8000 - 0113	concrete ring + cap Ø57

drivers

8000 - 0021	DALI dimmable driver 38W
8000 - 0022	0-10V dimmable driver 36W
8000 - 0023	non-dimmable driver 42W
8000 - 0026	DALI dimmable driver 60W
8000 - 0027	DALI deep dim driver 20W

luminaire output

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
350mA (5.7W)	290 lm	420 lm	585 lm	585 lm	325 lm	460 lm	645 lm	645 lm
500mA (8.5W)	450 lm	555 lm	730 lm	730 lm	495 lm	610 lm	805 lm	805 lm
700mA (12.8W)	505 lm	720 lm	955 lm	955 lm	560 lm	795 lm	1055 lm	1055 lm

order number

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
black ano.	8000-1033	8000-1034	8000-1035	8000-1752	8000-1036	8000-1037	8000-1038	8000-1753
white struc.	8000-1039	8000-1040	8000-1041	8000-1756	8000-1042	8000-1043	8000-1044	8000-1757