






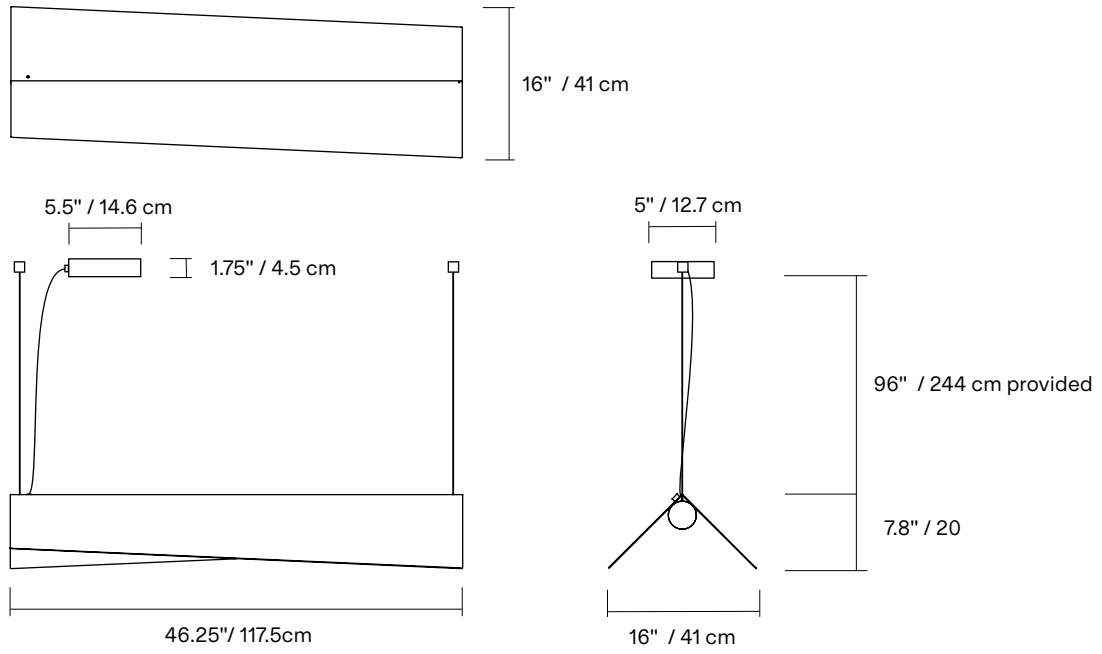
CLARK SUSPENSION




The Clark Collection pushes the limits of form without sacrificing functionality. Cut and bent metal create shades that both block and reflect the lamp's light source, casting an even wash of light on any surface. Marble is used not only to anchor the lamps, but also to provide a contemporary touch to its surrounding environment. The rich materials and subtle used of angles in these lamps seamlessly blend elegance and playfulness.

| | |
|------------------------------|--|
| TYPE | Suspension |
| CONSTRUCTION | Polished brass or powder coated aluminium shade milk polycarbonate diffuser with marble endcap polyester cord |
| SPECIFICATIONS | Source: LED array, integrated Power consumption: D: 30W, F: 45W Lumen output 2700K : brass / black / white D: 1880 / 1256 / 1920lm F: 2820 / 1884 / 2880lm Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h |
| CONTROL | 120/277V on/off, 0-10V or phase dimming (120V only) 220-240V: On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models |
| CORD LENGTH | 120"/ 304 cm |
| STAINLESS STEEL CABLE | 96"/ 244cm |
| WEIGHT | Brass: Powder coated aluminum: D: 6.94lbs / 3.15kg D: 10.25lbs / 4.65kg F: 32.10lbs / 13.56kg F: 10.25lbs / 4.65kg |
| CERTIFICATIONS |      IP20 |
| WARRANTY | 2 years |

Model D



Model F

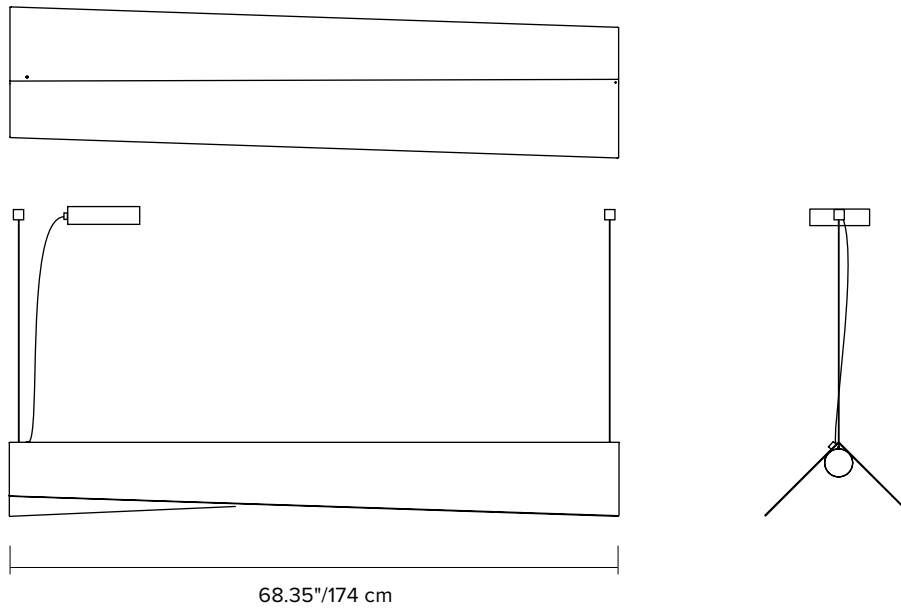

*dimensions are approximate and may vary slightly

FINISH



BR
Brass



BK
Textured
Black



WH
Textured
White

CORD



BK
Black



WH
White


END CAP



Marble

ANCHORS


Swivel option available for slanted ceilings (45 ° max angle)



NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on website for cleaning instructions

LAMP ANATOMY

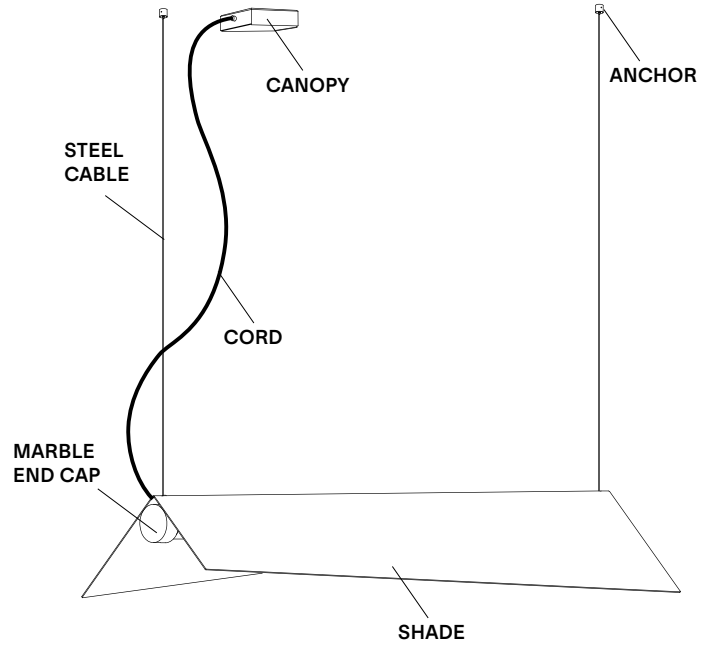

| | | Example | Fill with your selection |
|---------------------------------|--|-------------------------|--------------------------|
| COLLECTION | CLA Clark | CLA | CLA |
| MODEL | 02 | 02 | 02 |
| LENGTH* | D 46.3" F 68.4" | D | |
| SHADE | BR Brass BK Textured black WH Textured white | BR | |
| CORD | BK Black WH White | BK | |
| CANOPY AND ANCHORS | BK Textured black WH Textured white | BK | |
| COLOUR TEMPERATURE (CCT) | WL Warm light (2700K) NL Neutral light (3000K) D27 Dim to warm (2700K-2200K) D30 Dim to warm (3000K-2200K) CCT Other CCT available upon request** | WL | |
| DIMMING | ZT 0-10V (120VAC only) PH Phase dimming DA DALI (220-240VAC only) | ZT | |
| FULL SKU | | CLA02DBRBKWKWLZT | |
| NOTES | | | |

*Other sizes available upon request.

**Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively.
Not available with Dim-to-Warm feature.

TESTED DIMMER COMPATIBILITY LIST - 120V*

Phase cut dimming (leading edge or trailing edge**)

| DIMMER BRAND | MODEL | MAX LEVEL | MIN LEVEL | DIMMING PROTOCOL |
|--------------|------------|-----------|-----------|------------------|
| LUTRON | DVELV303P | 100% | 9% | Phase Cut |
| LUTRON | MAELV600 | 100% | 3% | Phase Cut |
| LUTRON | SELV300P | 100% | 9% | Phase Cut |
| LUTRON | CTELV-303P | 100% | 5% | Phase Cut |
| LUTRON | CTRP-253P | 100% | 5% | Phase Cut |
| LUTRON | PD-5NE | 100% | 7% | Phase Cut |
| LUTRON | DVRP-253P | 100% | 5% | Phase Cut |
| LUTRON | MA-PRO | 100% | 6% | Phase Cut |
| LUTRON | NTRP-250 | 100% | 8% | Phase Cut |
| LUTRON | NTELV-300 | 100% | 9% | Phase Cut |

TESTED DIMMER COMPATIBILITY LIST - 230V*

Phase cut dimming (leading edge or trailing edge**)

Clark D

| DIMMER BRAND | MODEL | MAX LEVEL | MIN LEVEL | DIMMING PROTOCOL |
|--------------|------------|-----------|-----------|------------------|
| CLIPSAL | 32E450TM | 100% | 1.4% | Phase Cut |
| CLIPSAL | 32E450UDM | 100% | 2.0% | Phase Cut |
| DIGINET | MEDM | 100% | 0.0% | Phase Cut |
| DIGINET | MMDM/PB | 100% | 0.0% | Phase Cut |
| ELKO | 315GLE | 100% | 0.1% | Phase Cut |
| ELKO | 316GLED | 100% | 8.8% | Phase Cut |
| GIRA | 117600/101 | 100% | 3.4% | Phase Cut |
| Legrand | 78401 | 100% | 0.0% | Phase Cut |
| Niko | 325 | 100% | 0.0% | Phase Cut |
| Schneider | 40300.RC | 100% | 2.5% | Phase Cut |

Clark F

| DIMMER BRAND | MODEL | MAX LEVEL | MIN LEVEL | DIMMING PROTOCOL |
|--------------|------------|-----------|-----------|------------------|
| CLIPSAL | 32E450TM | 100% | 1.9% | Phase Cut |
| CLIPSAL | 32E450UDM | 100% | 2.4% | Phase Cut |
| DIGINET | MEDM | 100% | 0.0% | Phase Cut |
| DIGINET | MMDM/PB | 100% | 0.0% | Phase Cut |
| ELKO | 315GLE | 100% | 0.3% | Phase Cut |
| ELKO | 316GLED | 100% | 2.2% | Phase Cut |
| GIRA | 117600/101 | 100% | 3.4% | Phase Cut |
| Legrand | 78401 | 100% | 0.0% | Phase Cut |
| Niko | 325 | 100% | 0.0% | Phase Cut |
| Schneider | 40300.RC | 100% | 2.3 % | Phase Cut |

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

**Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.