

ABSTRACT WALL

FINISH

satin brass

DIMENSIONS (body of fixture)

204 x 75 x 380 mm (w x d x h)

WEIGHT

1kg (2.2lbs)

ILLUMINATION

220-240v - 1 x G9 - 25w max halogen (or 2.3 LED 2700k)

110-130v - 1 x G9 - 25w max halogen (or 2.3 LED 2700k)

DIMMING

dimnable bulb required

trailing edge dimmable / phase cut (rotary dimmer): standard

DALI option available (220-240v only)





WALL ROSE / PLATE

round wall plate - \varnothing 114 x 5 mm (\varnothing x h)


CERTIFICATION



IP20



mounting plate dimensions



*Diagrams are not to scale.

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ABSWAOSB-240	satin brass	220 - 240V
ABSWAOSB-110	satin brass	110 - 130V

ABSTRACT WALL - DALI-A

FINISH

satin brass

DIMENSIONS (body of fixture)

204 x 75 x 380 mm (w x d x h)

WEIGHT

1kg (2.2lbs)

ILLUMINATION

220-240v - 1 x G9 - 25w max halogen (or 2.3 LED 2700k)
DALI converter to be installed in the cavity


DIMMING

dimnable bulb required
DALI compatible


WALL ROSE / PLATE

round wall plate - \varnothing 114 x 5 mm (\varnothing x h)


CERTIFICATION

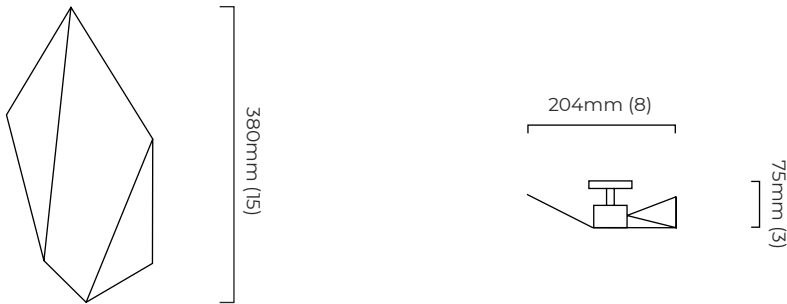

mounting plate dimensions



DALI converter dimensions



*Diagrams are not to scale.

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ABSWAOSB-DALIA-240	satin brass	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

ABSTRACT WALL - DALI-B

FINISH

satin brass

DIMENSIONS (body of fixture)

204 x 100 x 380 mm (w x d x h)

WEIGHT

1kg (2.2lbs)

ILLUMINATION

220-240v - 1 x G9 - 25w max halogen (or 2.3 LED 2700k)
DALI converter to be installed in the wall rose



DIMMING

dimnable bulb required
DALI compatible


WALL ROSE / PLATE

round wall plate - \varnothing 116 x 25 mm (\varnothing x h)

CERTIFICATION



mounting plate dimensions



*Diagrams are not to scale.

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ABSWAOSB -DALIB-240	satin brass	DALI B included - The light will feature a deeper ceiling/wall rose. For use when there is no space in the existing ceiling/wall cavity	220 - 240V