CTOLIGHTING

MODULO CHANDELIER GRID 11

FINISH

bronze with smoked kiln cast glass and opal glass shades satin brass with smoked kiln cast glass and opal glass shades

DIMENSIONS (body of fixture)

 $1665 \times 1050 \times 100 \text{ mm} (w \times d \times h)$

WEIGHT

18kg (39.7lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 145 mm maximum on request 6125 mm supplied with 1000 mm drop rod

ILLUMINATION

220-240v - integrated mains LED - 49.5w - 2700k 110-130v - integrated mains LED - 49.5w - 2700k

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240 ν only)

CEILING ROSE / PLATE


round ceiling rose - ø 116 x 25 mm (dia x h)


CERTIFICATION









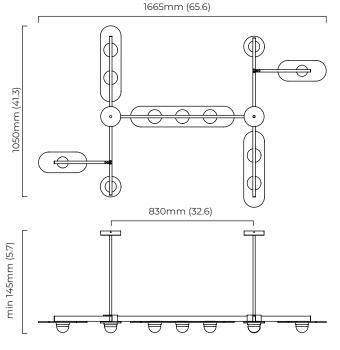



mounting plate dimensions

89mm

Ø 110mm (4.3) Ø 60mm (2.3)

*Diagrams are not to scale.

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
MODCH11BZSKMO-240	bronze with smoked kiln cast glass and opal glass shades	220 - 240V
MODCHIISBSKMO-240	satin brass with smoked kiln cast glass and opal glass shades	220 - 240V
MODCH11BZSKMO-110	bronze with smoked kiln cast glass and opal glass shades	110 - 130V
MODCHIISBSKMO-110	satin brass with smoked kiln cast glass and opal glass shades	110 - 130V

CTOLIGHTING

MODULO CHANDELIER GRID 11 - DALI-A

FINISH

bronze with smoked kiln cast glass and opal glass shades satin brass with smoked kiln cast glass and opal glass shades

DIMENSIONS (body of fixture)

 $1665 \times 1050 \times 100 \text{ mm} (w \times d \times h)$

WEIGHT

18kg (39.7lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 145 mm maximum on request 6125 mm supplied with 1000 mm drop rod

ILLUMINATION

220-240v - integrated mains LED - 49.5w - 2700k DALI converter to be installed in the ceiling cavity


DIMMING


DALI compatible


CEILING ROSE / PLATE

round ceiling rose - ø 116 x 25 mm (dia x h)

CERTIFICATION

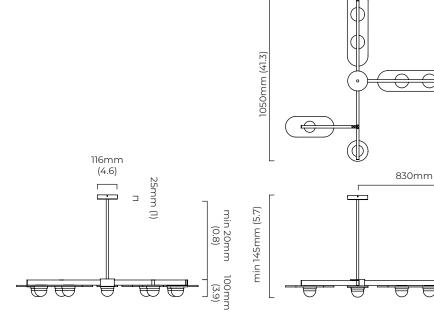

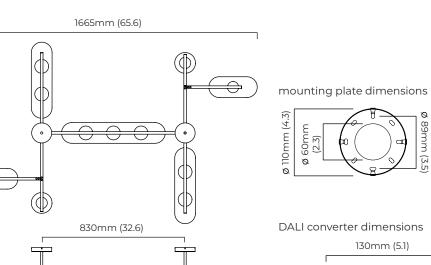



^{*}Diagrams are not to scale.

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
MODCH11BZSKMO-DALIA-240	bronze with smoked kiln cast glass and opal glass shades	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
MODCH11SBSKMO-DALIA-240	satin brass with smoked kiln cast glass and opal glass shades	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

CTOLIGHTING

MODULO CHANDELIER GRID 11 - DALI-B

FINISH

bronze with smoked kiln cast glass and opal glass shades satin brass with smoked kiln cast glass and opal glass shades

DIMENSIONS (body of fixture)

 $1665 \times 1050 \times 100 \text{ mm} (w \times d \times h)$

WEIGHT

18kg (39.7lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 155 mm maximum on request 6135 mm supplied with 1000 mm drop rod

ILLUMINATION

220-240v - integrated mains LED - 49.5w - 2700k DALI converter to be installed in the ceiling rose


DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling rose - ø 140 x 35 mm (dia x h)

CERTIFICATION

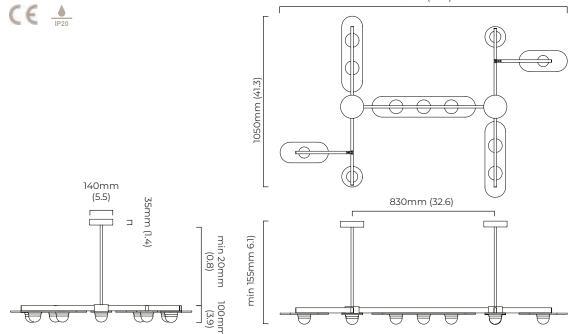





^{*}Diagrams are not to scale.

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
MODCH11BZSKMO-DALIB-240	bronze with smoked kiln cast glass and opal glass shades	DALI B included - The light will feature a deeper ceiling/wall rose. For use when there is no space in the existing ceiling/wall cavity	220 - 240V
MODCH11SBSKMO-DALIB-240	satin brass with smoked kiln cast glass and opal glass shades	DALI B included - The light will feature a deeper ceiling/wall rose. For use when there is no space in the existing ceiling/wall cavity	220 - 240V

1665mm (65.6)