),

État des Lieux 2A

Assembly instructions





Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation: to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.

-Your box should contain

1x canopy feed box assembly



box assembly



2x glass module



Tools needed, not included

- -2x 8-32 screws for junction box
- -5x wire connectors for junction box
- -2x 8-32 screws for ceiling
- -Screwdriver phillips and flat

First, gently insert the flat cable into the glass globe one side at a time.







Make sure the light globe don't rub the glass globe.

Make sure the light face the desired direction.


Height





Adjust and set it aside for next steps.


Mesure, mark and drill appropriate hole distance to mount backplate of canopy feed and supports to ceiling. Install anchors if needed (not included).



Model	Code	Height	Width	Depth
2A	В	89cm (35in)	59cm (23.3in)	28cm (11in)
	С	112cm (44in)	78cm (30.8in)	28cm (11in)
	D	201cm (79in)	151.6cm (59.7in)	28cm (11in)

Depth

*The dimensions are calculated with an angle of 45 deg of strap.








Unpack all components from the box and dispose of the packaging. Please recycle.

3 Screw backplate in junction box with screw 2x 8-32 machine screws (not included).

Attache ceiling ground wire to backplate ground screw. Make sure other wires go thru backplate center hole as illustrated.




Make sure to install the backplate the side where the strain relief will meet the cable.



14cm 5 ½ in

4 Make appropriate connextions with wire bundle provided to ceiling wiring. (Shut off main power at the circuit breaker panel)

Ceiling wires	Fixture wires	For 0-10	V dimming
	120V 220	OV	
Live	Black Bro	own	_
Neutral	White Blu	Purple	DC+
Ground	Green	Grey	DC-



) Nones


État des Lieux 2A

Assembly instructions







Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation: to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.

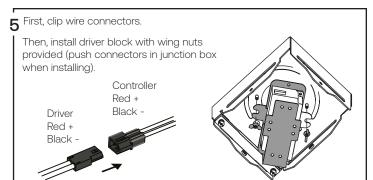



6 Fix non-feed canopy backplate on ceiling (screws not included).


Make sure to install the backplate the side where the strain relief will meet the cable.




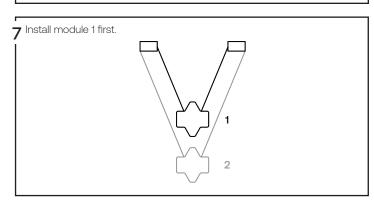

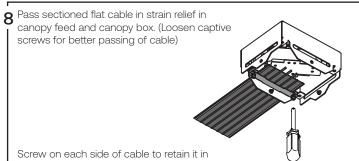

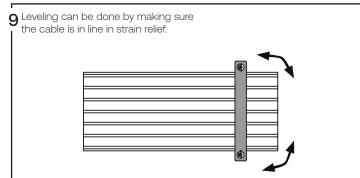


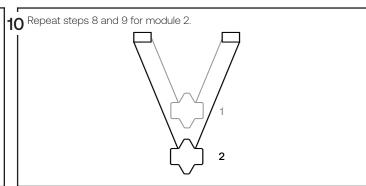

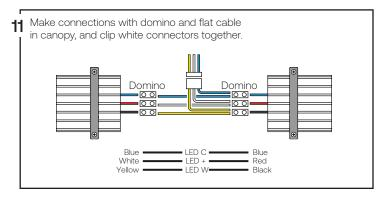

12 Install canopy covers by sliding up and curving slightly the flat cable to pass the cover.

Then, screw in place with 2x flat screw provided. (Lift cable out of the way for better access)





État des Lieux 1B

Assembly instructions





Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation: to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.

